


环保物料

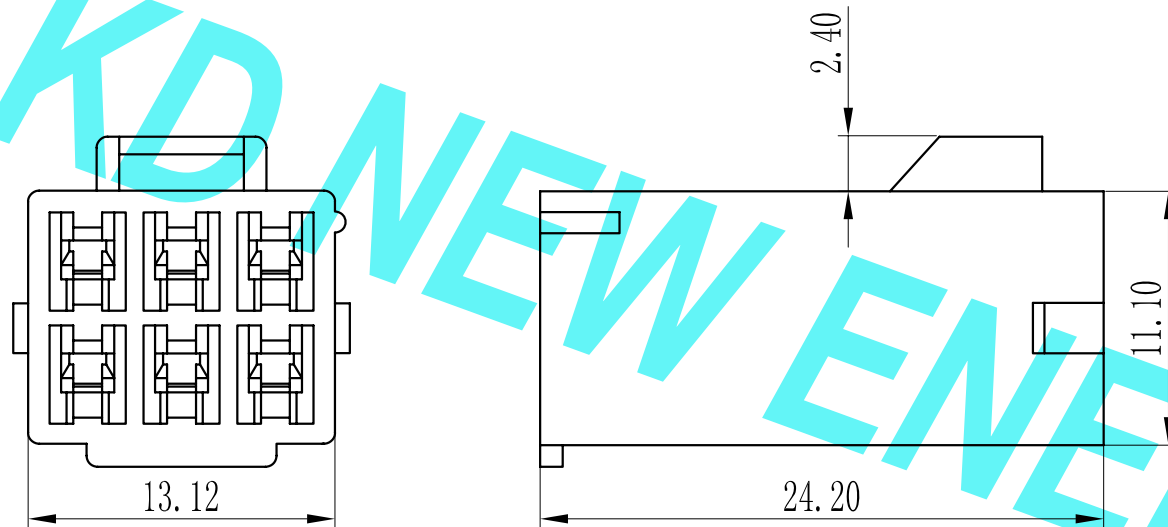

3941-2*03

技术参数 SPECIFICATIONS

- ◆间距: 3.96 Pitch:3.96
- ◆适用线规: AWG#24-#18
Applicable Wire:AWG#24-#18
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V (rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 1500V AC/minute
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO:	3941-02								
						APPROVED					DWG. NO:									
				<table border="1"> <tr> <th>LINEAR</th> <th>ANGLES</th> </tr> <tr> <td>0.0±0.25</td> <td>X° REF±6°</td> </tr> </table>		LINEAR	ANGLES	0.0±0.25	X° REF±6°	DESIGNER			TITLE:		3.96mm pitch Dual Housing		REV:	A0	SHEET:	1/1
LINEAR	ANGLES																			
0.0±0.25	X° REF±6°																			
A0	新图面发行		2018.11.22	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.11.22											
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°														