


# 环保物料

Pin数	尺寸A	尺寸B
4	7.50	10.00
5	10.00	12.50
6	12.50	15.00
7	15.00	17.50
8	17.50	20.00
9	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00
17	40.00	42.50
18	42.50	45.00
19	45.00	47.50
20	47.50	50.00
21	50.00	52.50
22	52.50	55.00
23	55.00	57.50
24	57.50	60.00
25	60.00	62.50
26	62.50	65.00
27	65.00	67.50

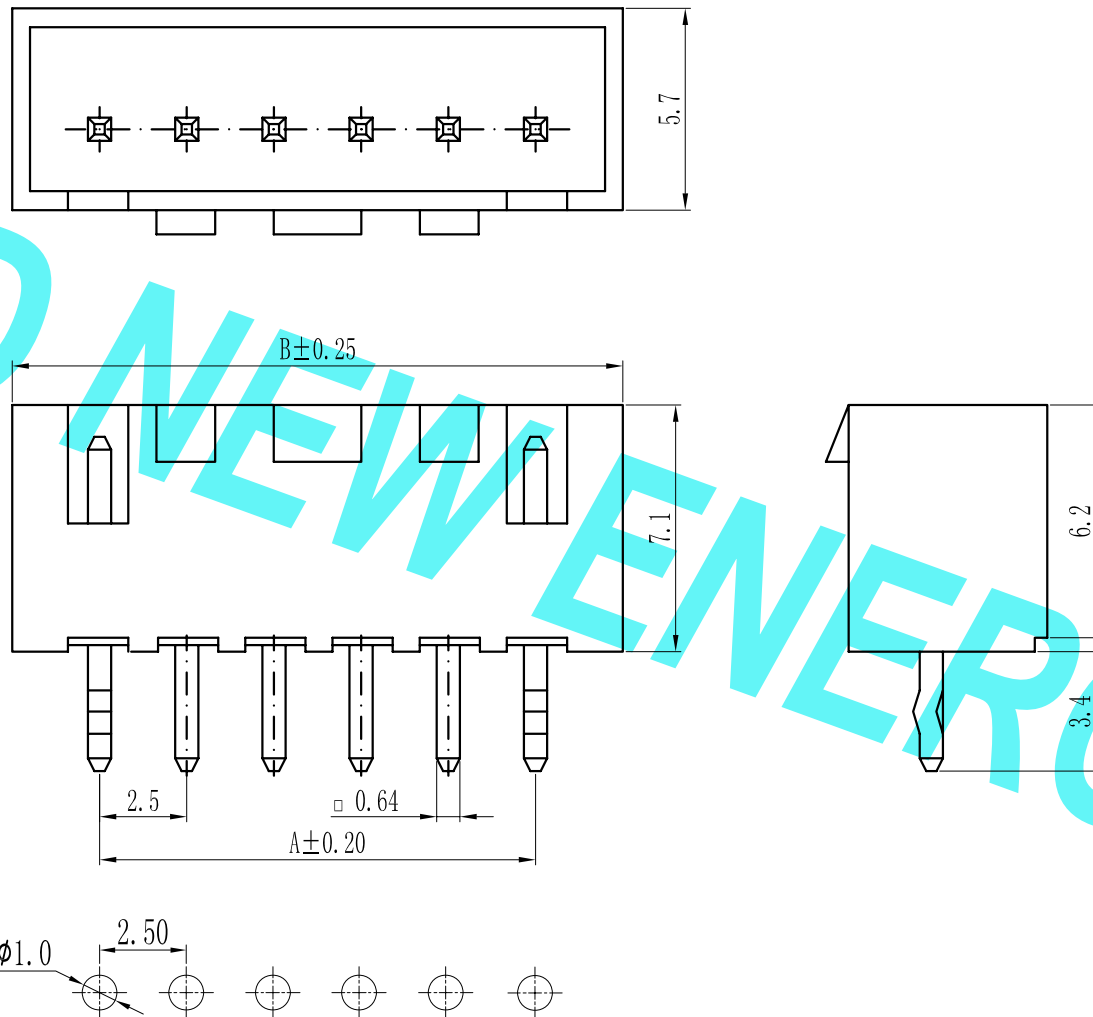

P. C. B LAYOUT

## 技术参数 SPECIFICATIONS

- ◆ 间距: 2.5 Pitch: 2.5
- ◆ 适用线规: AWG#22-#28  
Applicable Wire: AWG#22-#28
- ◆ 额定电压: AC, DC, 250V (有效值)  
Voltage rating: AC, DC, 250V(rms)
- ◆ 额定电流: 2.5A, AC, DC (AWG#22)  
Current rating: 2.5A, AC, DC (AWG#22)
- ◆ 耐压值: 800V AC/minute  
Withstand voltage: 800V AC/minute
- ◆ 工作温度: -25°C ~ +85°C  
Working Temp: -25°C ~ +85°C
- ◆ 绝缘电阻: ≥1000MΩ  
Insulation resistance: ≥1000MΩ
- ◆ 接触电阻: ≤10mΩ  
Contact resistance: ≤10mΩ

## 材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94-V0  
Insulator: Nylon66 UL94-V0

GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮编: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: XHS-B	
LINEAR	ANGLES	1:1	APPROVED			DWG. NO:	
0.00 ± 0.15	X° ± 3°		DESIGNER		TITLE: 2.50mm pitch Single Wafer		
0.000 ± 0.08	X° X' ± 2°		DRAWN	肖丽娟	2018.12.06	REV: A0	SHEET: 1/1

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---