


# 环保物料

Pin数	尺寸A	尺寸B	尺寸C
2	2.5	7.5	1.0
3	5.0	10.0	3.5
4	7.5	12.5	6.0
5	10.0	15.0	8.5
6	12.5	17.5	11.0
7	15.0	20.0	13.5
8	17.5	22.5	16.0
9	20.0	25.0	18.5
10	22.5	27.5	21.0
11	25.0	30.0	23.5
12	27.5	32.5	26.0
13	30.0	35.0	28.5
14	32.5	37.5	31.0
15	35.0	40.0	33.5
16	37.5	42.5	36.0

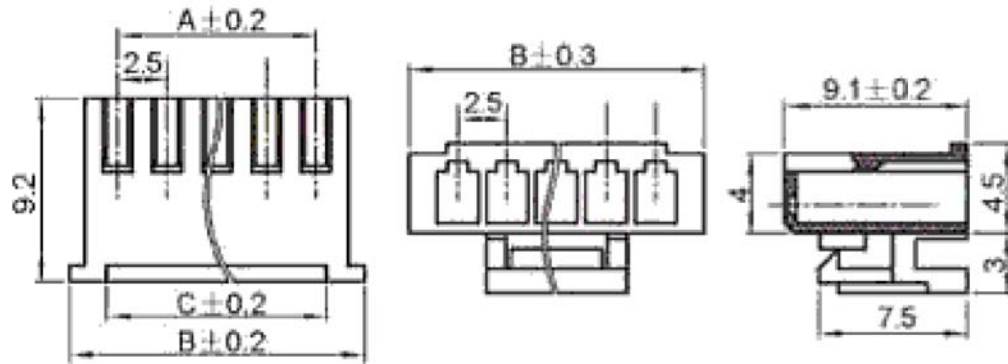

## 技术参数 SPECIFICATIONS

- ◆间距: 2.5 Pitch:2.5
- ◆适用线规: AWG#30-#22  
Applicable Wire:AWG#30-#22
- ◆额定电压: AC, DC, 250V (有效值)  
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 3.0A, AC, DC (AWG#22)  
Current rating:3.0A, AC, DC (AWG#22)
- ◆耐压值: 1000V AC/minute  
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ  
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤0.02Ω  
Contact resistance:≤0.02Ω

## 材料 MATERIAL

- ◆外壳: 尼龙66  
Housing:Nylon66
- ◆针座: 尼龙66  
Pin header:Nylon66
- ◆插针: 黄铜  
Pin:Brass
- ◆端子: 磷青铜  
Terminal:Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 <b>东莞市康导新能源科技有限公司</b> DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 电子邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO:	XHS-Y	
						APPROVED			TITLE:		DWG. NO:		
A0		新图面发行		2018.12.06	UNIT: MM	DESIGNER			2.50mm pitch Single Housing		REV: A0		
REV.		REVISION RECORD		DATE	SIZE: A4	DRAWN	肖丽娟	2018.12.06			SHEET: 1/1		