


环保物料

Pin数	尺寸A	尺寸B	尺寸C
2	2.5	7.5	4.00
3	5.0	10.0	3.22
4	7.5	12.5	5.72
5	10.0	15.0	8.22
6	12.5	17.5	10.72
7	15.0	20.0	13.22
8	17.5	22.5	15.72
9	20.0	25.0	18.22
10	22.5	27.5	20.72
11	25.0	30.0	23.22
12	27.5	32.5	25.72
13	30.0	35.0	28.22
14	32.5	37.5	30.72
15	35.0	40.0	33.22
16	37.5	42.5	35.72

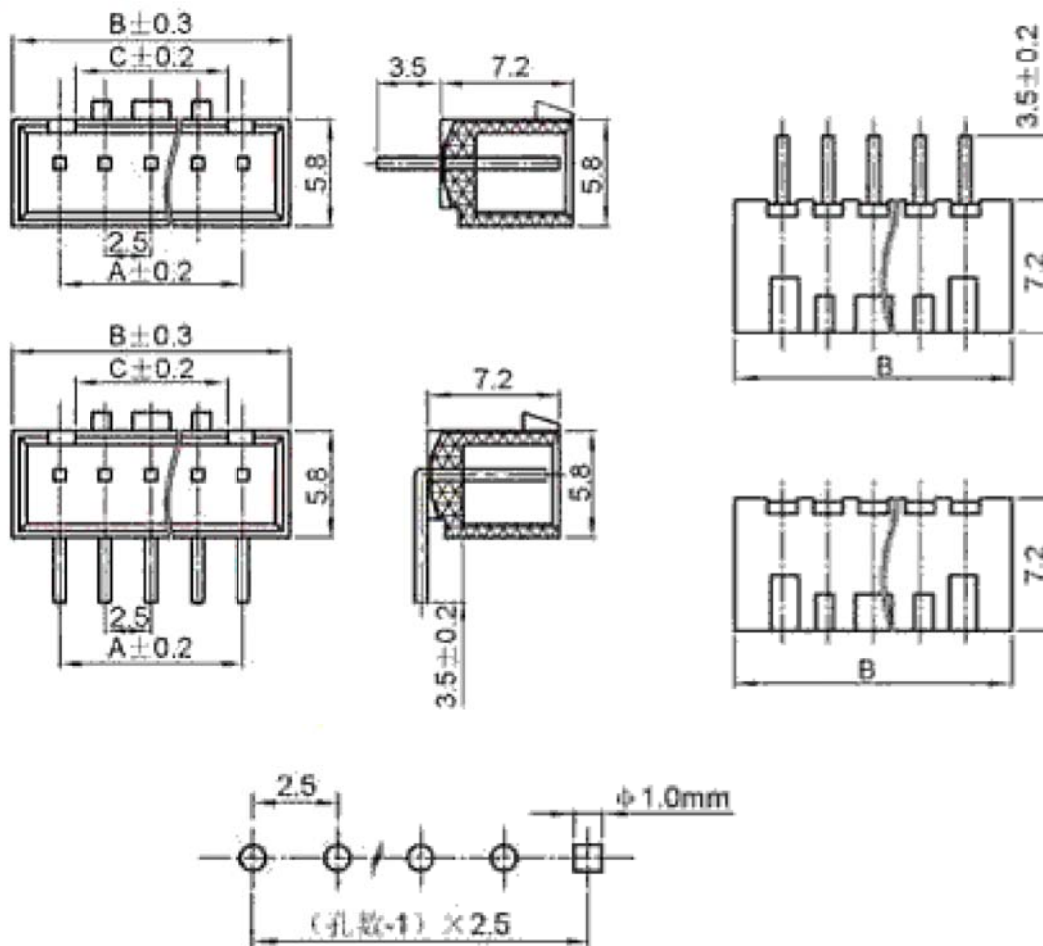

技术参数 SPECIFICATIONS

- ◆间距: 2.5 Pitch:2.5
- ◆适用线规: AWG#30-#22
Applicable Wire:AWG#30-#22
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 3.0A, AC, DC (AWG#22)
Current rating:3.0A, AC, DC (AWG#22)
- ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤0.02Ω
Contact resistance:≤0.02Ω

材料 MATERIAL

- ◆外壳: 尼龙66
Housing:Nylon66
- ◆针座: 尼龙66
Pin header:Nylon66
- ◆插针: 黄铜
Pin:Brass
- ◆端子: 磷青铜
Terminal:Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: XHS-A		
				LINEAR	ANGLES	APPROVED				DWG. NO:		
A0	新图面发行		2018.12.06	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER		TITLE: 2.50mm pitch Single Wafer			
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.06	REV:	A0	SHEET: 1/1