
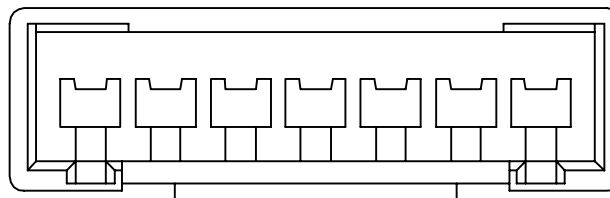


环保物料

Pin数	尺寸A	尺寸B	尺寸C
4	7.50	11.10	12.90
5	10.00	13.60	15.40
6	12.50	16.10	17.90
7	15.00	18.60	20.40
8	17.50	21.10	22.90
9	20.00	23.60	25.40
10	22.50	26.10	27.90
11	25.00	28.60	30.40
12	27.50	31.10	32.90
13	30.00	33.60	35.40
14	32.50	36.10	37.90
15	35.00	38.60	40.40
16	37.50	41.40	42.90
17	40.00	43.60	45.40
18	42.50	46.10	47.90
19	45.00	48.60	50.40
20	47.50	51.10	52.90
21	50.00	53.60	55.40
22	52.50	56.10	57.90
23	55.00	58.60	60.40
24	57.50	61.10	62.90
25	60.00	63.60	65.40
26	62.50	66.10	67.90
27	65.00	68.60	70.40

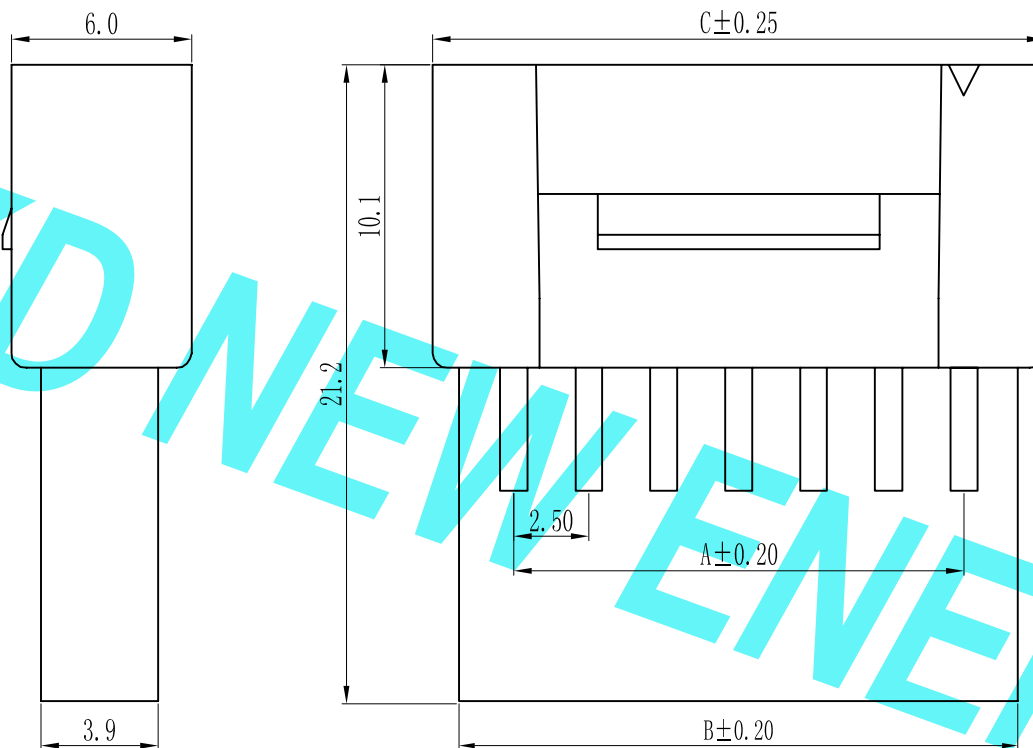

技术参数 SPECIFICATIONS

- ◆间距: 2.5 Pitch:2.5
- ◆适用线规: AWG#22-#30
Applicable Wire:AWG#22-#30
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V (rms)
- ◆额定电流: 3A, AC, DC (AWG#22)
Current rating:3A, AC, DC (AWG#22)
- ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤0.02mΩ
Contact resistance:≤0.02mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-V0
Insulator:Nylon66 UL94-V0



GENERAL TOLERANCES

LINEAR	ANGLES
0.00±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2018. 12. 06



东莞康导新能源科技有限公司

DONGGUAN ED NEW ENERGY TECHNOLOGY CO., LTD

公司网址: www.dgoonne.cn

公司电话: 0769-85337533

邮箱: 2850175986@qq.com

公司传真: 0769-85392827

PART. NO:

SMP2.5-nA

DWG. NO:

TITLE:

2.50mm pitch Single Housing

REV: A0

SHEET: 1/1