
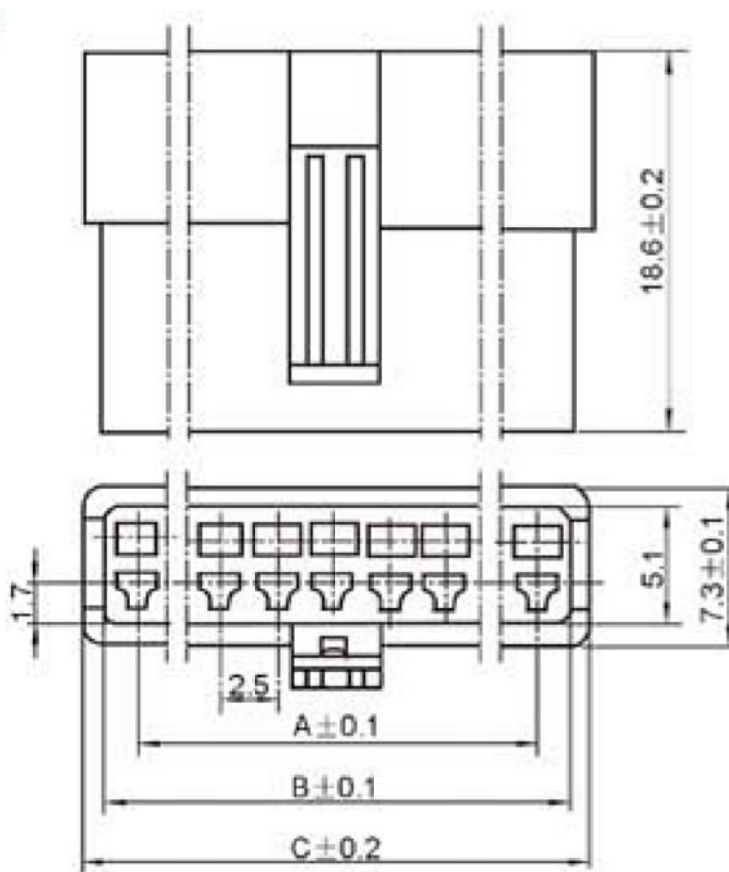


环保物料

Pin数	尺寸A	尺寸B	尺寸C
2	2.5	5.6	8.1
3	5.0	8.1	10.6
4	7.5	10.6	13.1
5	10.0	13.1	15.6
6	12.5	15.6	18.1
7	15.0	18.1	20.6
8	17.5	20.6	23.1
9	20.0	23.1	25.6
10	22.5	25.6	28.1
11	25.0	28.1	30.6
12	27.5	30.6	33.1

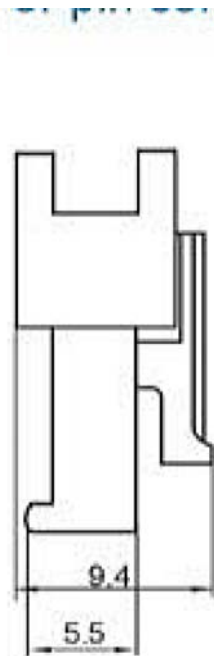

技术参数 SPECIFICATIONS

- ◆间距: 2.5 Pitch:2.5
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 3.0A, AC, DC (AWG#22)
Current rating:3.0A, AC, DC (AWG#22)
- ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤0.02Ω
Contact resistance:≤0.02Ω

材料 MATERIAL

- ◆外壳: 尼龙66, UL94-V0
Housing:Nylon66 UL94-V0
- ◆端子: 磷青铜
Terminal:Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 电子邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: SM-A	
				LINEAR 0.0±0.25 ANGLES X° REF±6°		APPROVED			TITLE: 2.50mm pitch Single Housing		DWG. NO:	
A0	新图面发行		2018.12.06	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				REV:	A0
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.06			SHEET: 1/1