


环保物料

Pin数	尺寸A	尺寸B	尺寸C
2	2.5	5.5	11.5
3	5.0	8.0	14.0
4	7.5	10.5	16.5
5	10.0	13.0	19.0
6	12.5	15.5	21.5
7	15.0	18.0	24.0
8	17.5	20.5	26.5
9	20.0	23.5	29.0
10	22.5	25.5	31.5
11	25.0	28.0	34.0
12	27.5	30.5	36.5

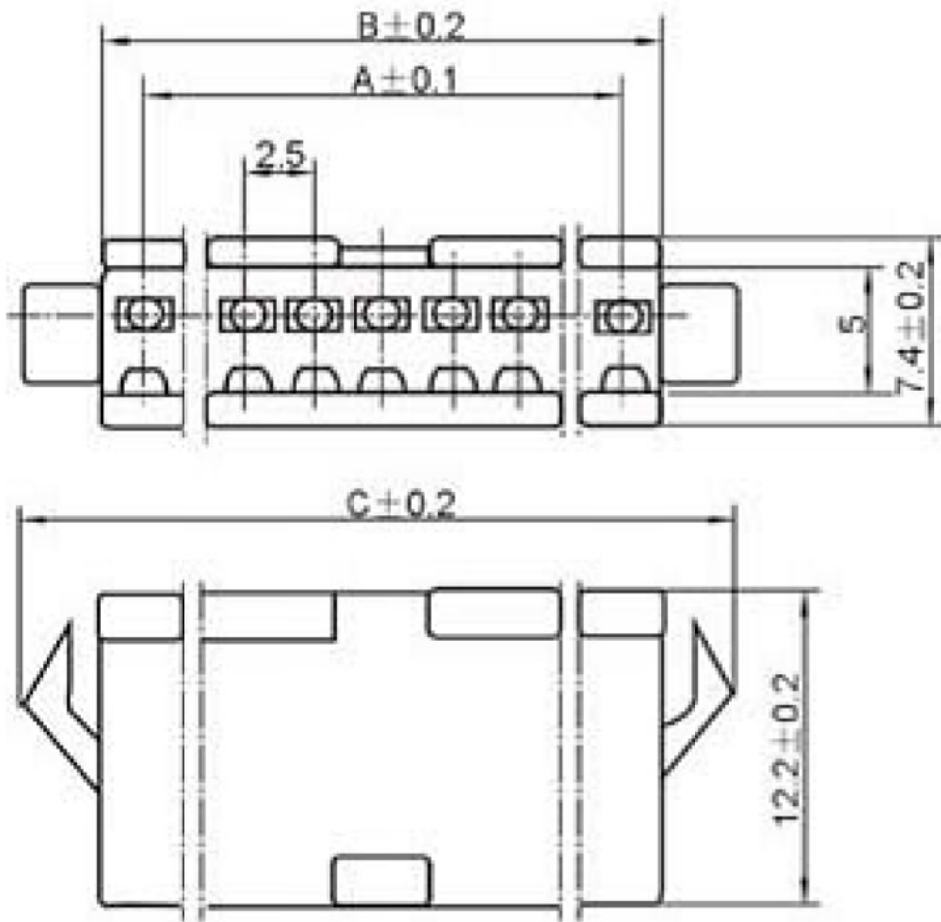

- 技术参数 SPECIFICATIONS
- ◆间距: 2.5 Pitch:2.5
 - ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
 - ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
 - ◆额定电流: 3.0A, AC, DC (AWG#22)
Current rating:3.0A, AC, DC (AWG#22)
 - ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
 - ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
 - ◆接触电阻: ≤0.02Ω
Contact resistance:≤0.02Ω

- 材料 MATERIAL
- ◆外壳: 尼龙66, UL94-V0
Housing:Nylon66 UL94-V0
 - ◆端子: 磷青铜
Terminal:Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN ED NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: SM-Y	
				LINEAR: 0.0±0.25 ANGLES: X° REF±6°		APPROVED			TITLE: 2.50mm pitch Single Housing		DWG. NO:	
A0		新图面发行		2018.12.06	UNIT: MM	DESIGNER					REV: A0 SHEET: 1/1	
REV.		REVISION RECORD		DATE	SIZE: A4	DRAWN	肖丽娟	2018.12.06				