
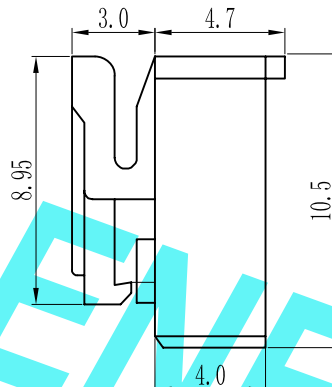
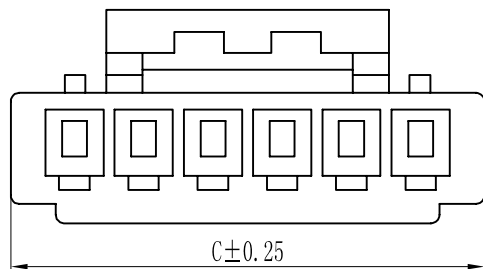
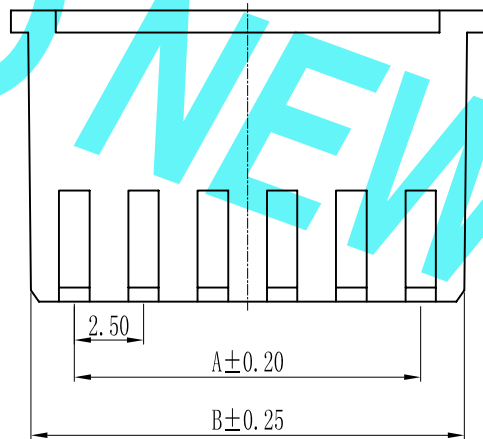


环保物料

Pin数	尺寸A	尺寸B	尺寸C
4	7.50	10.70	12.10
5	10.00	13.20	14.60
6	12.50	15.70	17.10
7	15.00	18.20	19.60
8	17.50	20.70	22.10
9	20.00	23.20	24.60
10	22.50	25.70	27.10
11	25.00	28.20	29.60
12	27.50	30.70	32.10
13	30.00	33.20	34.60
14	32.50	35.70	37.10
15	35.00	38.20	39.60
16	37.50	40.70	42.10
17	40.00	43.20	44.60
18	42.50	45.70	47.10
19	45.00	48.20	49.60
20	47.50	50.70	52.10
21	50.00	53.20	54.60
22	52.50	55.70	57.10
23	55.00	58.20	59.60
24	57.50	60.70	62.10
25	60.00	63.20	64.60
26	62.50	65.70	67.10
27	65.00	68.20	69.60

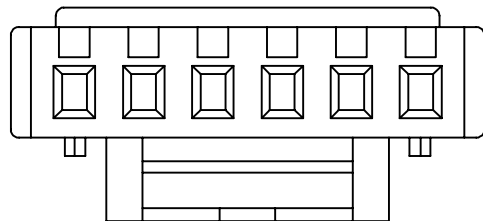

技术参数 SPECIFICATIONS

- ◆间距: 2.5 Pitch:2.5
- ◆适用线规: AWG#22-#30
Applicable Wire:AWG#22-#30
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 3A, AC, DC (AWG#24)
Current rating:3A, AC, DC (AWG#24)
- ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤0.02mΩ
Contact resistance:≤0.02mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO:	SMH2.5-nY	
				 LINEAR: 0.00±0.15 ANGLES: X° REF±6°		APPROVED			TITLE:		DWG. NO:		
A0		新图面发行		2018.12.06	UNIT: MM	DESIGNER			2.50mm pitch Single Housing		REV:	A0	SHEET: 1/1
REV.		REVISION RECORD		DATE	SIZE: A4	DRAWN	肖丽娟	2018.12.06					