
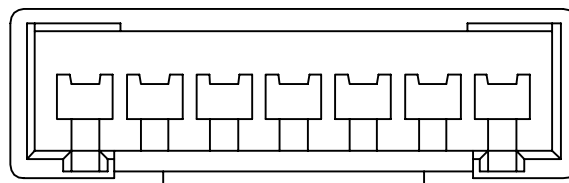


# 环保物料

Pin数	尺寸A	尺寸B	尺寸C
4	7.50	11.10	12.90
5	10.00	13.60	15.40
6	12.50	16.10	17.90
7	15.00	18.60	20.40
8	17.50	21.10	22.90
9	20.00	23.60	25.40
10	22.50	26.10	27.90
11	25.00	28.60	30.40
12	27.50	31.10	32.90
13	30.00	33.60	35.40
14	32.50	36.10	37.90
15	35.00	38.60	40.40
16	37.50	41.40	42.90
17	40.00	43.60	45.40
18	42.50	46.10	47.90
19	45.00	48.60	50.40
20	47.50	51.10	52.90
21	50.00	53.60	55.40
22	52.50	56.10	57.90
23	55.00	58.60	60.40
24	57.50	61.10	62.90
25	60.00	63.60	65.40
26	62.50	66.10	67.90
27	65.00	68.60	70.40

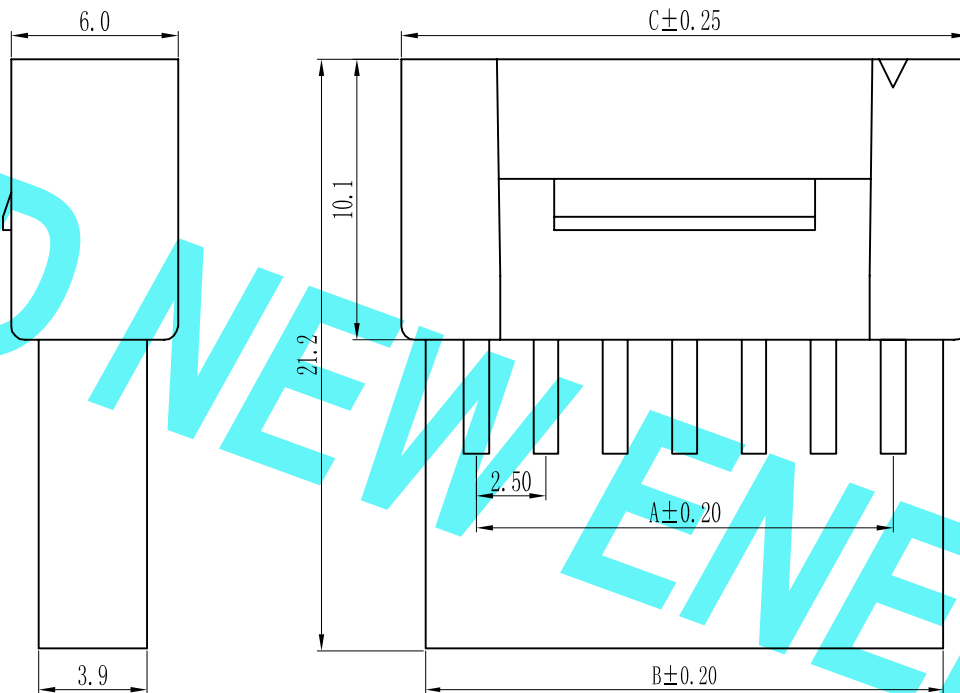

## 技术参数 SPECIFICATIONS

- ◆间距: 2.5 Pitch:2.5
- ◆适用线规: AWG#22-#30  
Applicable Wire:AWG#22-#30
- ◆额定电压: AC, DC, 250V (有效值)  
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 3A, AC, DC (AWG#24)  
Current rating:3A, AC, DC (AWG#24)
- ◆耐压值: 1000V AC/minute  
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ  
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤0.02mΩ  
Contact resistance:≤0.02mΩ

## 材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0  
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<b>东莞市康导新能源科技有限公司</b> DONGGUANG ED NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: SMP2.5-nA		
				LINEAR	ANGLES	APPROVED				DWG. NO:		
A0	新图面发行		2018.12.06	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER		TITLE: 2.50mm pitch Single Housing		REV: A0	SHEET: 1/1
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.06			