


环保物料

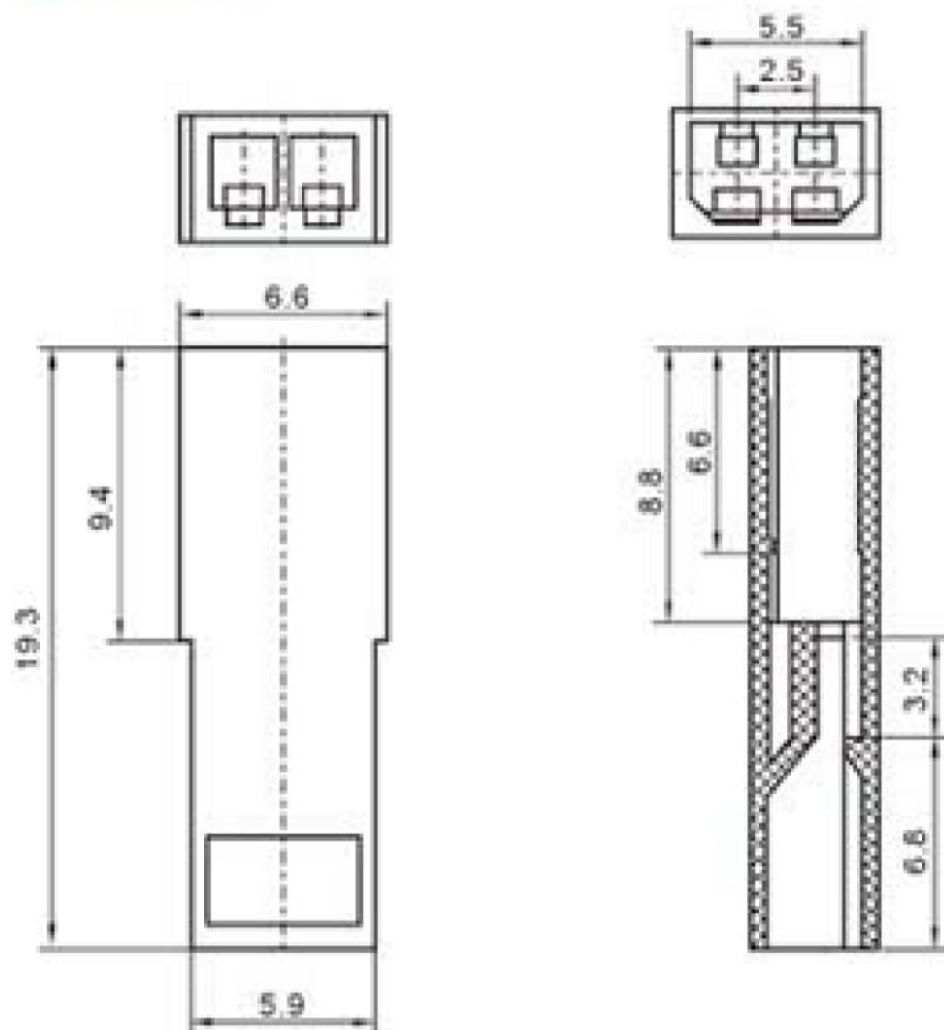

技术参数 SPECIFICATIONS

- ◆ 间距: 2.5 Pitch: 2.5
- ◆ 线数: 2-40 Poles: 2-40
- ◆ 适用线规: AWG#22-#28
Applicable Wire: AWG#22-#28
- ◆ 额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V (rms)
- ◆ 额定电流: 3.0A, AC, DC (AWG#22)
Current rating: 3.0A, AC, DC (AWG#22)
- ◆ 耐压值: 1000V AC/minute
Withstand voltage: 1000V AC/minute
- ◆ 工作温度: -25°C ~ +85°C
Working Temp: -25°C ~ +85°C
- ◆ 绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆ 接触电阻: $\leq 0.02\Omega$
Contact resistance: $\leq 0.02\Omega$

材料 MATERIAL

- ◆ 外壳: 尼龙66, UL94-V0
Housing: Nylon66 UL94-V0
- ◆ 针座: 尼龙66, UL94-V0
Wafer: Nylon66 UL94-V0
- ◆ 端子: 磷青铜
Terminal: Phosphor bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN ED NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: SYP-A	
						APPROVED			TITLE: 2.50mm pitch Single Housing		DWG. NO:	
A0		新图面发行		2018.12.06	UNIT: MM	DESIGNER					REV: A0	
REV.		REVISION RECORD		DATE	SIZE: A4	DRAWN	肖丽娟	2018.12.06			SHEET: 1/1	