


环保物料

Pin数	尺寸A	尺寸B	尺寸C
4	7.50	10.70	12.50
5	10.00	13.20	15.00
6	12.50	15.70	17.50
7	15.00	18.20	20.00
8	17.50	20.70	22.50
9	20.00	23.20	25.00
10	22.50	25.70	27.50
11	25.00	28.20	30.00
12	27.50	30.70	32.50
13	30.00	33.20	35.00
14	32.50	35.70	37.50
15	35.00	38.20	40.00
16	37.50	40.70	42.50
17	40.00	43.20	45.00
18	42.50	45.70	47.50
19	45.00	48.20	50.00
20	47.50	50.70	52.50
21	50.00	53.20	55.00
22	52.50	55.70	57.50
23	55.00	58.20	60.00
24	57.50	60.70	62.50
25	60.00	63.20	65.00
26	62.50	65.70	67.50
27	65.00	68.20	70.00

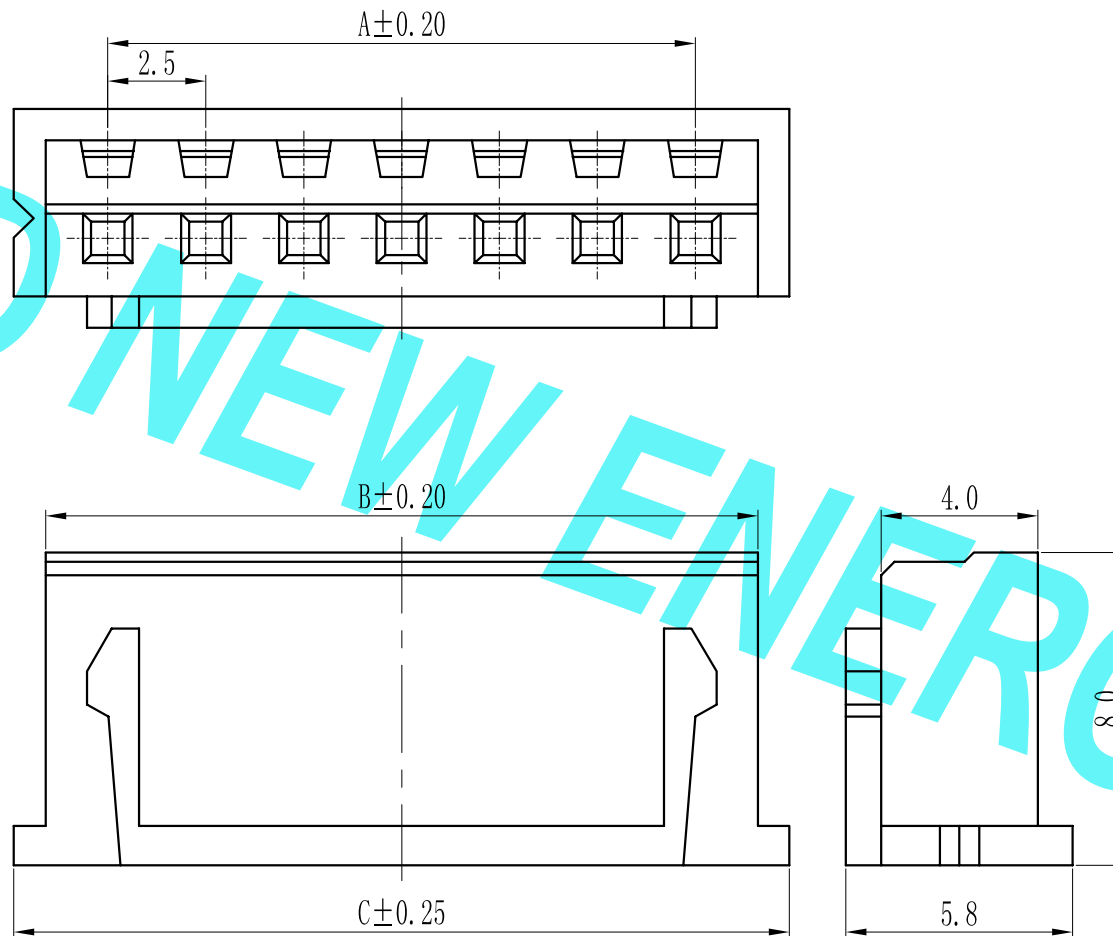

技术参数 SPECIFICATIONS

- ◆ 间距: 2.5 Pitch: 2.5
- ◆ 适用线规: AWG#22-#28
Applicable Wire: AWG#22-#28
- ◆ 额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆ 额定电流: 2.5A, AC, DC (AWG#22)
Current rating: 2.5A, AC, DC (AWG#22)
- ◆ 耐压值: 800V AC/minute
Withstand voltage: 800V AC/minute
- ◆ 工作温度: -25°C ~ +85°C
Working Temp: -25°C ~ +85°C
- ◆ 绝缘电阻: ≥1000MΩ
Insulation resistance: ≥1000MΩ
- ◆ 接触电阻: ≤10mΩ
Contact resistance: ≤10mΩ

材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94-V0
Insulator: Nylon66 UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN ED NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: XH-NY
				LINEAR: 0.00 ± 0.15 ANGLES: X° REF ± 6°		APPROVED			TITLE: 2.50mm pitch Single Housing		DWG. NO:
AO	新图面发行		2018.12.06	UNIT: MM	X° ± 3°	DESIGNER					REV: AO
REV.	REVISION RECORD		DATE	SIZE: A4	X° X' ± 2°	DRAWN	肖丽娟	2018.12.06			SHEET: 1/1