


环保物料

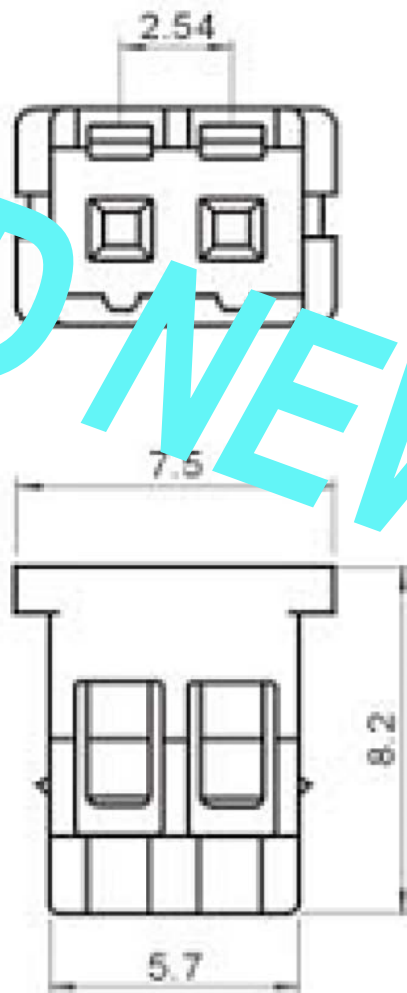

美尚美间距条形连接器  
M S M Pitch Bar Connector  
技术参数 SPECIFICATIONS

间距: 2.54 Pitch: 2.54  
适用线规: AWG#22-#28  
Applicable Wire: AWG#22-#28  
额定电压: AC, DC, 100V (有效值)  
Voltage rating: AC, DC, 100V (rms)  
额定电流: 3.0A, AC, DC  
Current rating: 3.0A, AC, DC  
耐压值: 800V AC/minute  
Withstand voltage: 800V AC/minute  
工作温度: -25°C ~ +85°C  
Working Temp: -25°C ~ +85°C  
绝缘电阻:  $\geq 1000M\Omega$   
Insulation resistance:  $\geq 1000M\Omega$   
接触电阻:  $\leq 20m\Omega$   
Contact resistance:  $\leq 20m\Omega$

材料 MATERIAL  
外壳: 尼龙66 UL94V-0  
针座: PBT  
1. 基座: 尼龙66 UL94V-0  
2. 插针: 磷青铜  
3. 端子: 磷青铜

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgkonne.cn 公司电话: 0769-85337633 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: M S M-2Y		
				LINEAR	ANGLES	APPROVED				DWG. NO:		
A0	新图面发行	2018.12.10	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER			TITLE: 2.54mm pitch Single Housing		REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN	肖丽娟	2018.12.10				

KD NEW ENERGY