


环保物料

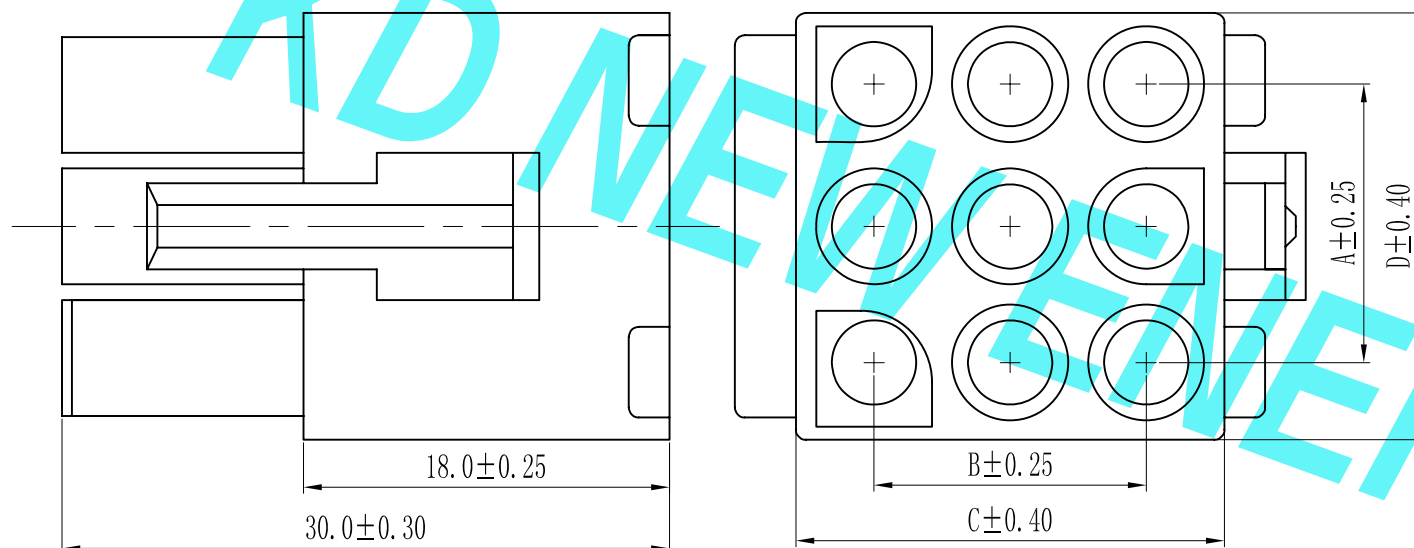

技术参数:

间距: 6.7

适用线规: AWG#20~#14

额定电压: 500V DC/AC(有效值)

额定电流: 8.0-12A

耐压值: 1500V AC(有效值)

工作温度: -25℃~+85℃

绝缘电阻: $\geq 1000M\Omega$

接触电阻: $\leq 0.02\Omega$

材料:

外壳: 尼龙66 UL94V-0

端子: 磷青铜

Pin数	尺寸A	尺寸B	尺寸C	尺寸D
2	6.70	0	7.80	14.50
3	13.40	0	7.80	21.20
4	20.10	0	7.80	27.90
6	13.40	6.70	14.50	21.20
9	13.40	13.40	21.20	21.20
12	20.10	13.40	21.20	27.90
15	26.80	13.40	21.20	34.60



GENERAL TOLERANCES

SCALE:
1:1

NAME

DATE

LINEAR

ANGLES

APPROVED

0.0±0.25

X° REF±6°

DESIGNER

0.00±0.15

X° ±3°

DRAWN

0.000±0.08

X° X'±2°

肖丽娟

2018.12.18



东莞市康号新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD

公司网址: www.dgkonne.cn

公司电话: 0769-85337533

邮箱: 2850175986@qq.com

公司传真: 0769-85392827

TITLE:

6.70mm pitch Housing

PART. NO:

3191-nY

DWG. NO:

REV: A0

SHEET: 1/1

A0 新图面发行

2018.12.18

UNIT: MM

SIZE: A4

REVISION RECORD

DATE