

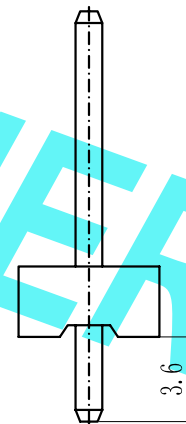
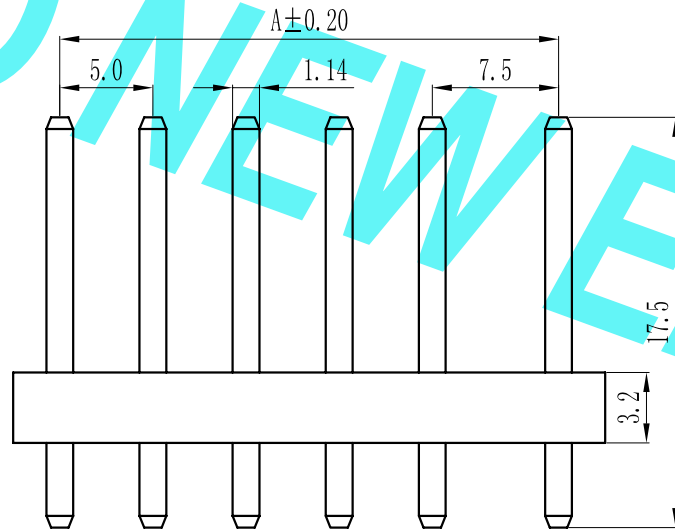


# 环保物料

Pin数	尺寸A	尺寸B
3	12.50	17.50
4	17.50	22.50
5	22.50	27.50
6	27.50	32.50
7	32.50	37.50
8	37.50	42.50
9	42.50	47.50
10	47.50	52.50
11	52.50	57.50
12	57.50	62.50
13	62.50	67.50
14	67.50	72.50
15	72.50	77.50
16	77.50	82.50
17	82.50	87.50
18	87.50	92.50
19	92.50	97.50
20	97.50	102.50

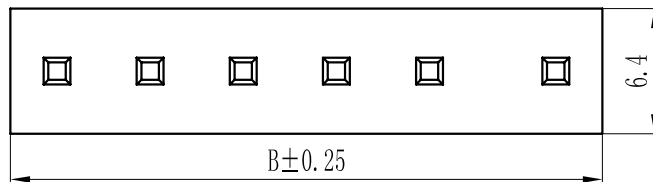

P. C. B LAYOUT

## 技术参数 SPECIFICATIONS

- ◆间距: 7.5/5.0 Pitch:7.5/5.0
  - ◆适用线规: AWG#26-#14  
Applicable Wire:AWG#26-#14
  - ◆额定电压: AC,DC, 250V (有效值)  
Voltage rating: AC,DC, 250V(rms)
  - ◆额定电流: 5A, AC, DC  
Current rating:5A, AC, DC
  - ◆耐压值: 1500V AC/minute  
Withstand voltage:1500V AC/minute
  - ◆工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
  - ◆绝缘电阻: ≥1000MΩ  
Insulation resistance:≥1000MΩ
  - ◆接触电阻: ≤20mΩ  
Contact resistance:≤20mΩ
- 材料 MATERIAL
- ◆绝缘体: 尼龙66, UL94-0  
Insulator:Nylon66 UL94-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN ED NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 7504-XX		
				LINEAR	ANGLES	APPROVED				DWG. NO:		
A0	新图面发行		2018.12.18	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER		TITLE: 7.50-5.00mm pitch Single Wafer		REV: A0	SHEET: 1/1
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.18			