


环保物料

外壳 <Y>
HOUSING

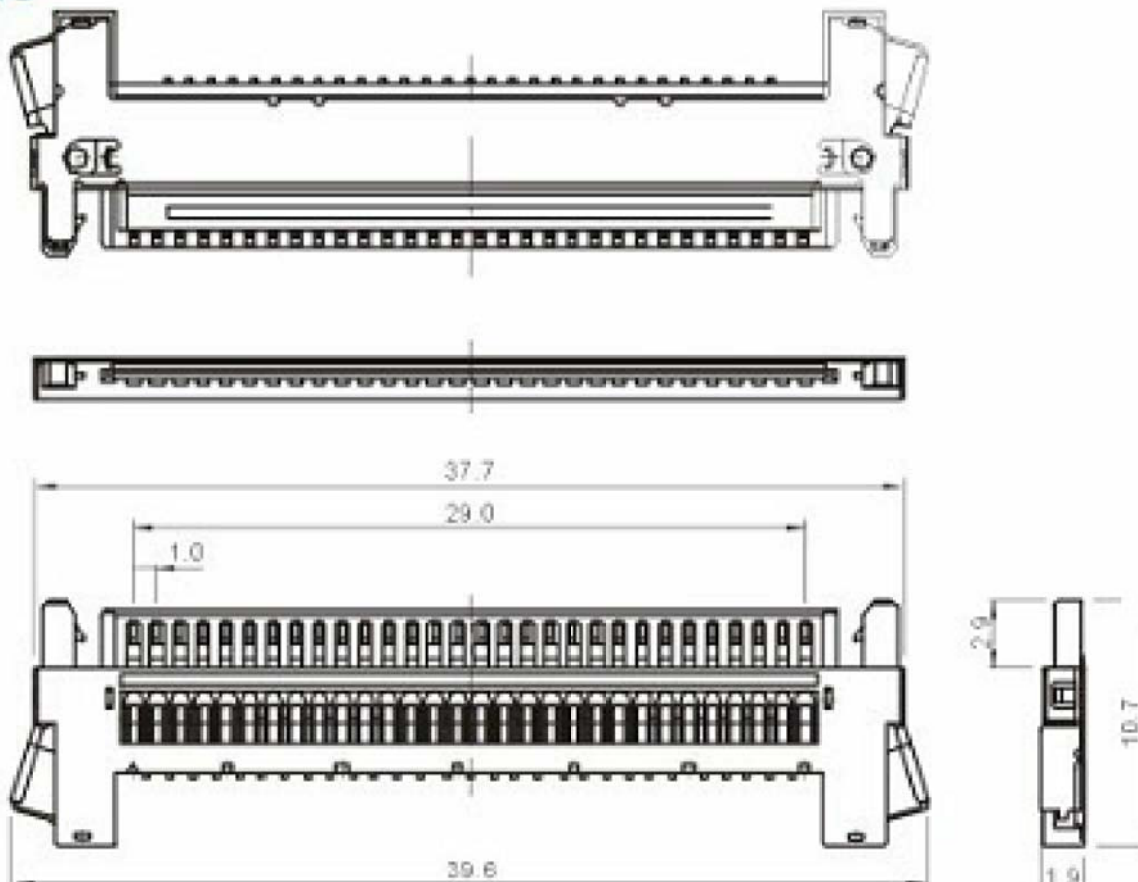

技术参数 SPECIFICATIONS

- ◆间距: 1.0mm
Pitch: 1.0mm
 - ◆线数: 30
Poles: 30
 - ◆适用线规: AWG#30~#36
Applicable Wire: AWG#30~#36
 - ◆额定电压: 200V DC, AC(rms)
Rated voltage: 200V DC, AC(rms)
 - ◆额定电流: 1A (AWG #28)
Rated Current: 1A (AWG #28)
 - ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/min
 - ◆工作温度: -40°C~+85°C
Working Temp: -40°C~+85°C
 - ◆绝缘电阻: 100MΩ Min
Insulation resistance: ≥100MΩ
 - ◆接触电阻: ≤40mΩ
Contact resistance: ≤40mΩ
- 材料 MATERIAL
- ◆外壳: 尼龙46
Insulator: Nylon46
 - ◆接地板: 不锈钢
Ground plate: Stainless steel
 - ◆锁扣: 不锈钢
Lock level: Stainless steel
 - ◆端子: 磷青铜 镀金
Terminal: Phosphor bronze Gold-plated

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN ED NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 销售热线: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: F1-X-HL(1.0)
						APPROVED			TITLE: 1.00mm pitch Single Housing		DWG. NO:
						DESIGNER					REV: A0
A0	新图面发行	2018.12.03	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.12.03			SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X' ±2°						