


环保物料

Pin数	尺寸A	尺寸B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	11.50
6	7.50	13.00
7	9.00	14.50
8	10.50	16.00
9	12.00	17.50
10	13.50	19.00
11	15.00	20.50
12	16.50	22.00
13	18.00	23.50
14	19.50	25.00
15	21.00	26.50
16	22.50	28.00
17	24.00	29.50
18	25.50	31.00
19	27.00	32.50
20	28.50	34.00
21	30.00	35.50
22	31.50	37.00
23	33.00	38.50
24	34.50	40.00
25	36.00	41.50

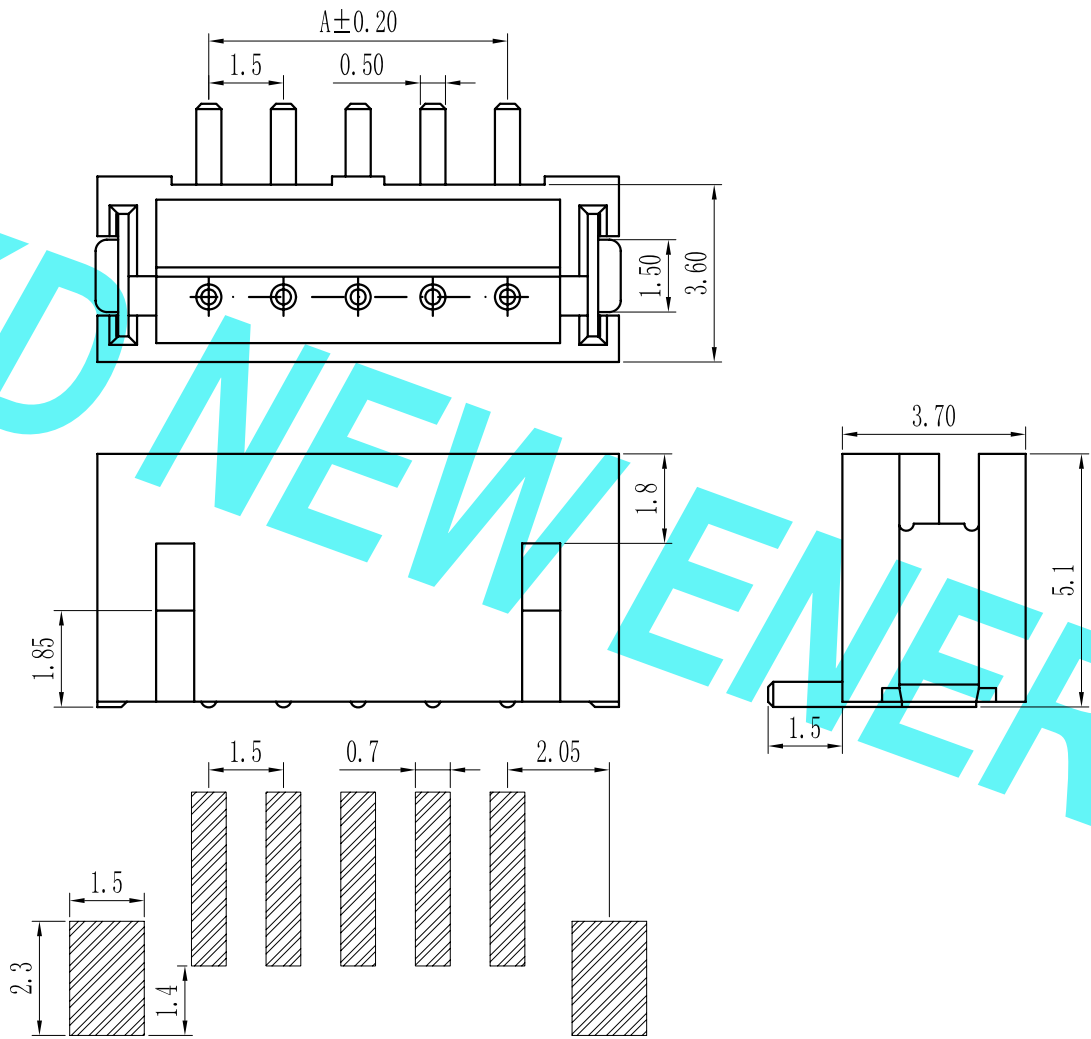

技术参数 SPECIFICATIONS

- ◆ 间距: 1.5 Pitch: 1.5
- ◆ 适用线规: AWG#26-#30
Applicable Wire: AWG#26-#30
- ◆ 额定电压: AC, DC, 100V (有效值)
Voltage rating: AC, DC, 100V(rms)
- ◆ 额定电流: 1.0A, AC, DC
Current rating: 1.0A, AC, DC
- ◆ 耐压值: 500V AC/minute
Withstand voltage: 500V AC/minute
- ◆ 工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆ 绝缘电阻: $\geq 500\text{M}\Omega$
Insulation resistance: $\geq 500\text{M}\Omega$
- ◆ 接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94V-0
Insulator: Nylon66 UL94V-0
- ◆ 接触针: 磷青铜
Contact PIN: Phosphor bronze

P. C. B LAYOUT

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: 1.5T-2-NA	
				LINEAR: 0.00 ± 0.25 ANGLES: $X^{\circ} \text{ REF} \pm 6^{\circ}$		APPROVED			DESIGNER:		DWG. NO:	
A0		新图面发行		2018. 12. 04		DESIGNER			TITLE: 1.50mm pitch Single Wafer		REV: A0	
REV.		REVISION RECORD		DATE		SIZE: A4	0.000 \pm 0.08	$X^{\circ} X' \pm 2^{\circ}$	DRAWN	肖丽娟	2018. 12. 04	SHEET: 1/1