
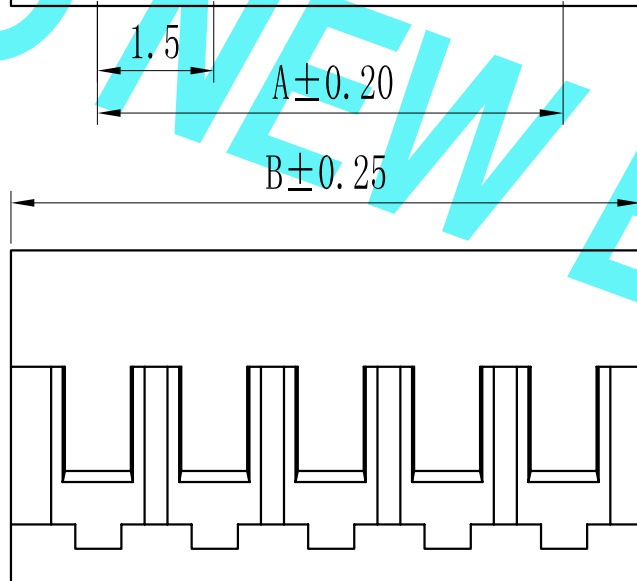


# 环保物料

Pin数	尺寸A	尺寸B
2	1.50	3.70
3	3.00	5.20
4	4.50	6.70
5	6.00	8.20
6	7.50	9.70
7	9.00	11.20
8	10.50	12.70
9	12.00	14.20
10	13.50	15.70
11	15.00	17.20
12	16.50	18.70
13	18.00	20.20
14	19.50	21.70
15	21.00	23.20
16	22.50	24.70
17	24.00	26.20
18	25.50	27.70
19	27.00	29.20
20	28.50	30.70
21	30.00	32.20
22	31.50	33.70
23	33.00	35.20
24	34.50	36.70
25	36.00	38.20

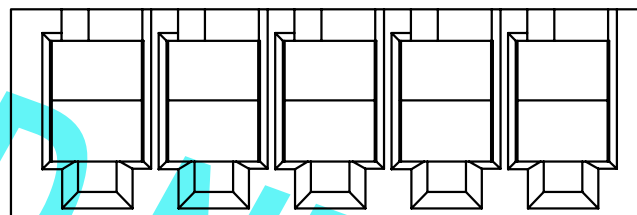

## 技术参数 SPECIFICATIONS

- ◆间距: 1.5 Pitch:1.5
- ◆适用线规: AWG#26-#30  
Applicable Wire:AWG#26-#30
- ◆额定电压: AC,DC,100V (有效值)  
Voltage rating: AC,DC,100V(rms)
- ◆额定电流: 1.0A, AC, DC  
Current rating:1.0A, AC, DC
- ◆耐压值: 500V AC/minute  
Withstand voltage:500V AC/minute
- ◆工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥500MΩ  
Insulation resistance:≥500MΩ
- ◆接触电阻: ≤20mΩ  
Contact resistance:≤20mΩ

## 材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0  
Insulator:Nylon66 UL94V-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 <b>东莞市康导新能源科技有限公司</b> DONGGUANG ED NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: <b>1.5T-3</b>
						APPROVED			TITLE: <b>1.50mm pitch Single Housing</b>		DWG. NO:
A0	新图面发行	2018.12.04	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER					REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.04			SHEET: 1/1