
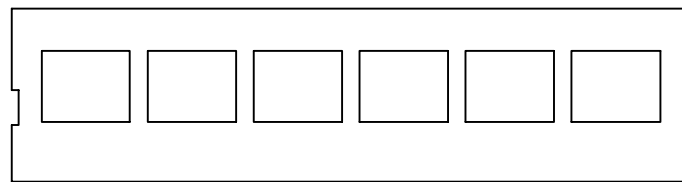

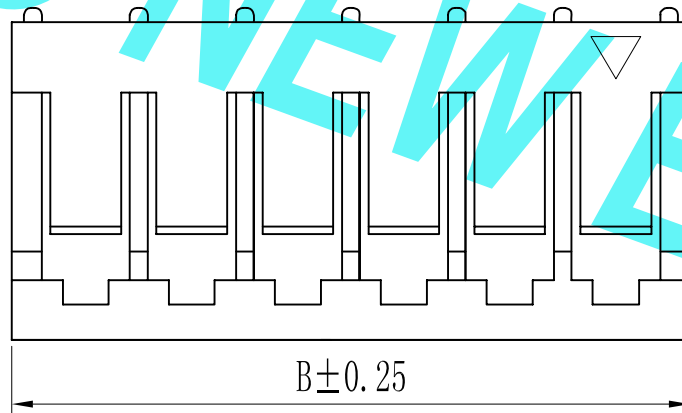


环保物料

| Pin数 | 尺寸A | 尺寸B |
|------|-------|-------|
| 2 | 1.50 | 3.70 |
| 3 | 3.00 | 5.20 |
| 4 | 4.50 | 6.70 |
| 5 | 6.00 | 8.20 |
| 6 | 7.50 | 9.70 |
| 7 | 9.00 | 11.20 |
| 8 | 10.50 | 12.70 |
| 9 | 12.00 | 14.20 |
| 10 | 13.50 | 15.70 |
| 11 | 15.00 | 17.20 |
| 12 | 16.50 | 18.70 |
| 13 | 18.00 | 20.20 |
| 14 | 19.50 | 21.70 |
| 15 | 21.00 | 23.20 |
| 16 | 22.50 | 24.70 |
| 17 | 24.00 | 26.20 |
| 18 | 25.50 | 27.70 |
| 19 | 27.00 | 29.20 |
| 20 | 28.50 | 30.70 |
| 21 | 30.00 | 32.20 |
| 22 | 31.50 | 33.70 |
| 23 | 33.00 | 35.20 |
| 24 | 34.50 | 36.70 |
| 25 | 36.00 | 38.20 |

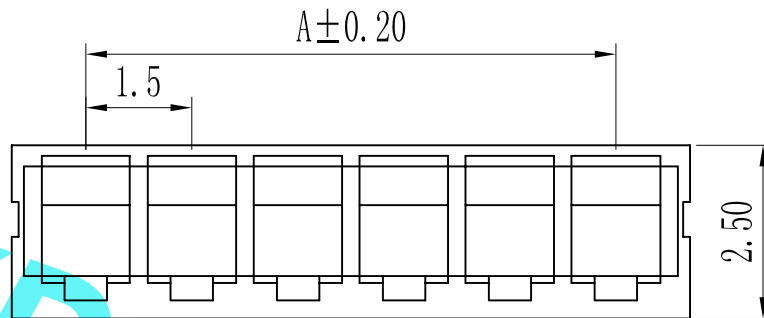

技术参数 SPECIFICATIONS

- ◆间距: 1.5 Pitch:1.5
- ◆适用线规: AWG#26-#30
Applicable Wire:AWG#26-#30
- ◆额定电压: AC, DC, 100V (有效值)
Voltage rating: AC, DC, 100V(rms)
- ◆额定电流: 1.0A, AC, DC
Current rating:1.0A, AC, DC
- ◆耐压值: 500V AC/minute
Withstand voltage:500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥500MΩ
Insulation resistance:≥500MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0

| REV. | | REVISION RECORD | DATE | UNIT: MM | SIZE: A4 | GENERAL TOLERANCES | SCALE: 1:1 | NAME | DATE | 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827 | PART. NO: | | | | | |
|------------------------------------|----------|-----------------|------------|----------|----------|--|------------|--------|-----------|--|-----------|-----------|----------|----------|--|--|
| A0 | 新图面发行 | | 2018.12.04 | MM | A4 | <table border="1"> <tr> <th>LINEAR</th> <th>ANGLES</th> </tr> <tr> <td>0.00±0.15</td> <td>X° ±3°</td> </tr> <tr> <td>0.00±0.08</td> <td>X° X'±2°</td> </tr> </table> | LINEAR | ANGLES | 0.00±0.15 | | X° ±3° | 0.00±0.08 | X° X'±2° | APPROVED | | |
| LINEAR | ANGLES | | | | | | | | | | | | | | | |
| 0.00±0.15 | X° ±3° | | | | | | | | | | | | | | | |
| 0.00±0.08 | X° X'±2° | | | | | | | | | | | | | | | |
| TITLE: 1.50mm pitch Single Housing | | | | | | | | | | DWG. NO: | | | | | | |
| | | | | | | | | | | REV: A0 | | | | | | |
| | | | | | | | | | | SHEET: 1/1 | | | | | | |