
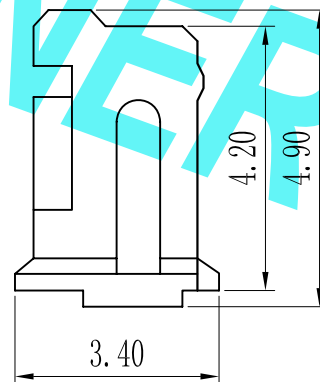
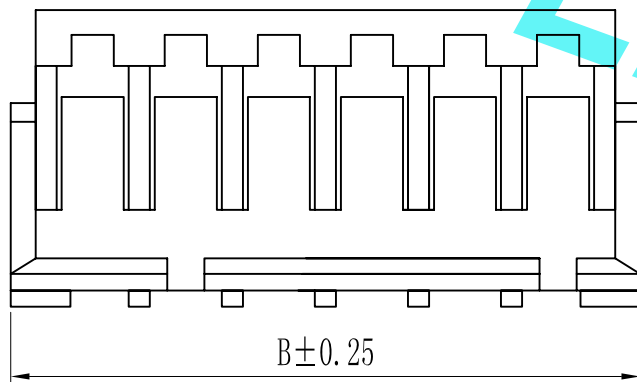


环保物料

Pin数	尺寸A	尺寸B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	11.50
7	9.00	13.00
8	10.50	14.50
9	12.00	16.00
10	13.50	17.50
11	15.00	19.00
12	16.50	20.50
13	18.00	22.00
14	19.50	23.50
15	21.00	25.00
16	22.50	26.50
17	24.00	28.00
18	25.50	29.50
19	27.00	31.00
20	28.50	32.50
21	30.00	34.00
22	31.50	35.50
23	33.00	37.00
24	34.50	38.50
25	36.00	40.00

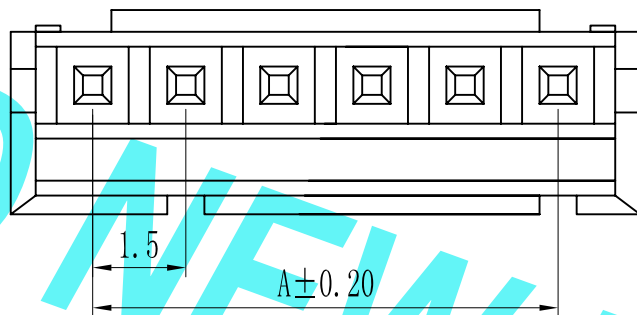

技术参数 SPECIFICATIONS

- ◆ 间距: 1.5 Pitch:1.5
- ◆ 适用线规: AWG#26-#30
Applicable Wire:AWG#26-#30
- ◆ 额定电压: AC, DC, 100V (有效值)
Voltage rating: AC, DC, 100V(rms)
- ◆ 额定电流: 1.0A, AC, DC
Current rating:1.0A, AC, DC
- ◆ 耐压值: 500V AC/minute
Withstand voltage:500V AC/minute
- ◆ 工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆ 绝缘电阻: ≥500MΩ
Insulation resistance:≥500MΩ
- ◆ 接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94V-0
Insulator:Nylon66 UL94V-0



GENERAL TOLERANCES

LINEAR	ANGLES
0.0±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X'±2°

SCALE:
1:1

NAME

DATE



东莞市康导新能源科技有限公司
DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD

公司网址: www.dgoonne.cn 公司电话: 0769-85337533
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

PART. NO:

1.5T-2-NY

DWG. NO:

TITLE:

1.50mm pitch Single Housing

REV: A0

SHEET: 1/1

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	DRAWN	肖丽娟	2018.12.04
A0	新图面发行	2018.12.04	UNIT: MM	0.00±0.15	X° ±3°		