
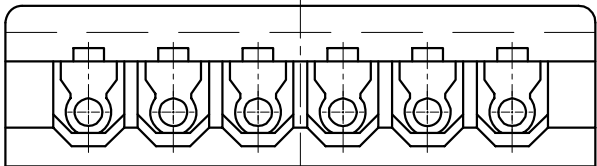
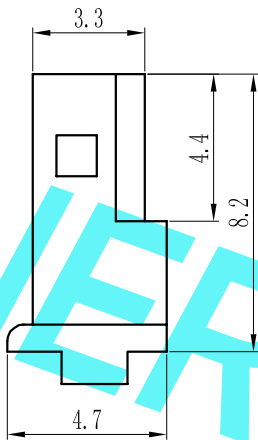
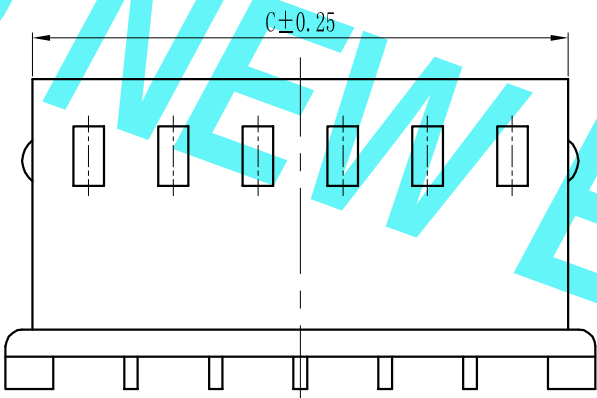


环保物料

Pin数	尺寸A	尺寸B	尺寸C
4	7.50	12.40	10.85
5	10.00	14.90	13.35
6	12.50	17.40	15.85
7	15.00	19.90	18.35
8	17.50	22.40	20.85
9	20.00	24.90	23.35
10	22.50	27.40	25.85
11	25.00	29.90	28.35
12	27.50	32.40	30.85
13	30.00	34.90	33.35
14	32.50	37.40	35.85
15	35.00	39.90	38.35
16	37.50	42.40	40.85
17	40.00	44.90	43.35
18	42.50	47.40	45.85
19	45.00	49.90	48.35
20	47.50	52.40	50.85
21	50.00	54.90	53.35
22	52.50	57.40	55.85
23	55.00	59.90	58.35
24	57.50	62.40	60.85
25	60.00	64.90	63.35
26	62.50	67.40	65.85
27	65.00	69.90	68.35

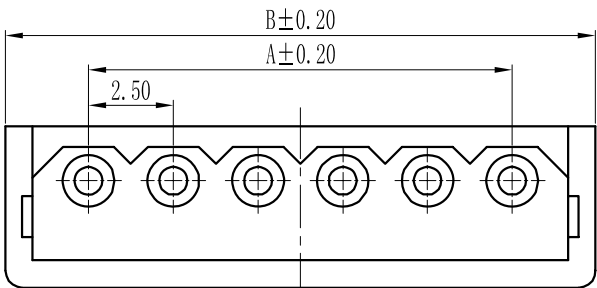

- 技术参数
 SPECIFICATIONS
- ◆间距: 2.5 Pitch:2.5
 - ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
 - ◆额定电压: AC,DC,250V (有效值)
Voltage rating: AC,DC,250V(rms)
 - ◆额定电流: 3A, AC, DC (AWG#22)
Current rating:3A, AC, DC (AWG#22)
 - ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
 - ◆工作温度: -40℃~+105℃
Working Temp:-40℃~+105℃
 - ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
 - ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

- 材料
 MATERIAL
- ◆绝缘体: 尼龙66, UL94-V0
Insulator:Nylon66 UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 5246-NY	
				LINEAR	ANGLES					APPROVED	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2018.12.06		UNIT: MM	0.00±0.15	X° ±3°					TITLE: 2.50mm pitch Single Housing
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.06	REV: A0 SHEET: 1/1		