


环保物料

Pin数	尺寸A	尺寸B	尺寸C
4	7.50	10.40	12.00
5	10.00	12.90	14.50
6	12.50	15.40	17.00
7	15.00	17.90	19.50
8	17.50	20.40	22.00
9	20.00	22.90	24.50
10	22.50	25.40	27.00
11	25.00	27.90	29.50
12	27.50	30.40	32.00
13	30.00	32.90	34.50
14	32.50	35.40	37.00
15	35.00	37.90	39.50
16	37.50	40.40	42.00
17	40.00	42.90	44.50
18	42.50	45.40	47.00
19	45.00	47.90	49.50
20	47.50	50.40	52.00
21	50.00	52.90	54.50
22	52.50	55.40	57.00
23	55.00	57.90	59.50
24	57.50	60.40	62.00
25	60.00	62.90	64.50
26	62.50	65.40	67.00
27	65.00	67.90	69.50

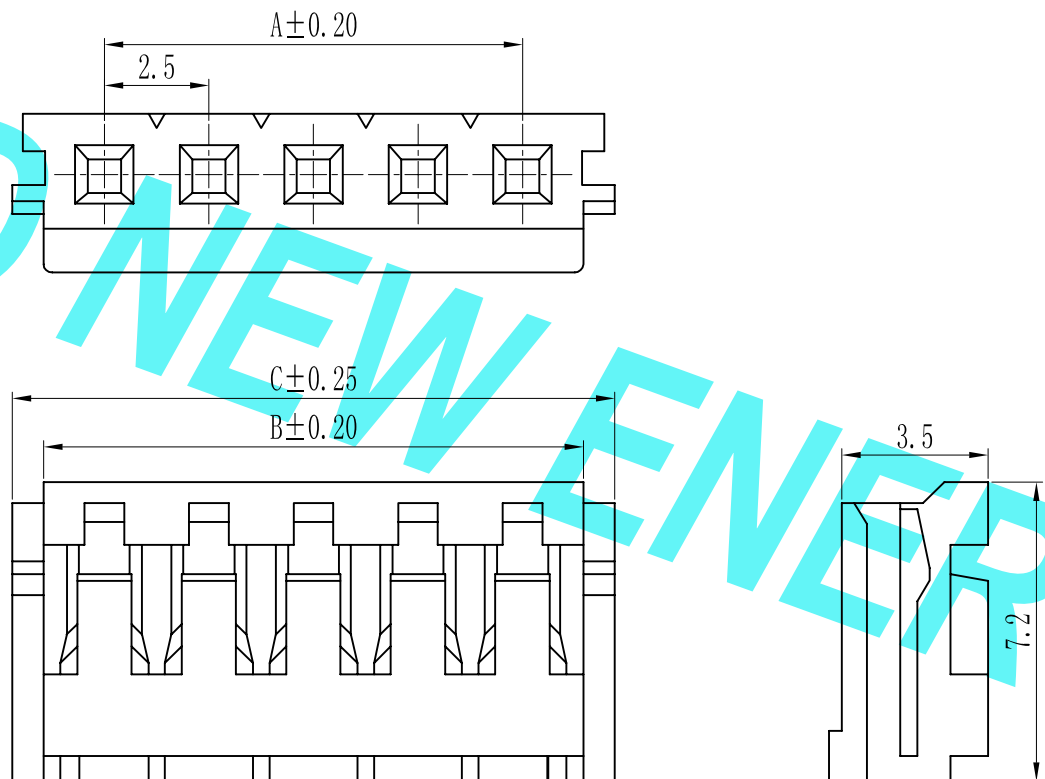

技术参数 SPECIFICATIONS

- ◆ 间距: 2.5 Pitch: 2.5
- ◆ 适用线规: AWG#22-#28
Applicable Wire: AWG#22-#28
- ◆ 额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆ 额定电流: 2.5A, AC, DC (AWG#22)
Current rating: 2.5A, AC, DC (AWG#22)
- ◆ 耐压值: 800V AC/minute
Withstand voltage: 800V AC/minute
- ◆ 工作温度: -25°C ~ +85°C
Working Temp: -25°C ~ +85°C
- ◆ 绝缘电阻: ≥1000MΩ
Insulation resistance: ≥1000MΩ
- ◆ 接触电阻: ≤10mΩ
Contact resistance: ≤10mΩ

材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94-V0
Insulator: Nylon66 UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: EH-NY
						APPROVED					DWG. NO:
A0		新图面发行		2018.12.06	UNIT: MM	DESIGNER			TITLE: 2.50mm pitch Single Housing		REV: A0
REV.		REVISION RECORD		DATE	SIZE: A4	DRAWN	肖丽娟	2018.12.06			SHEET: 1/1