

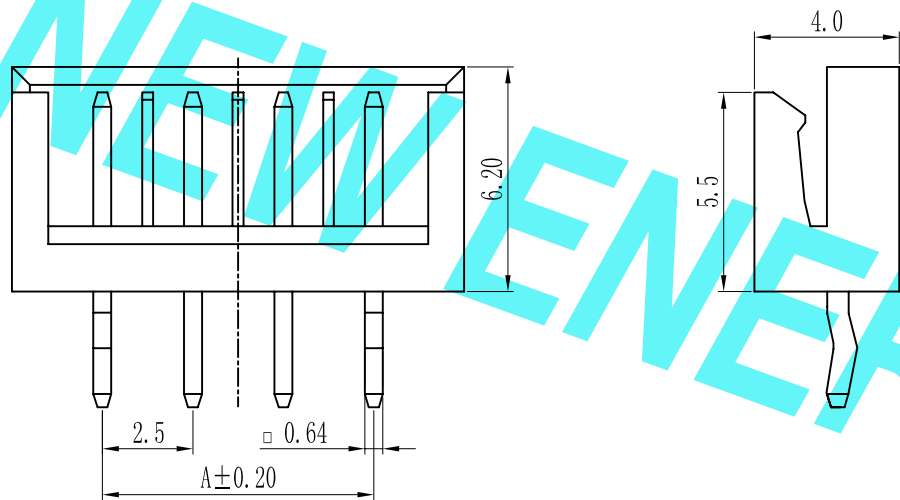


# 环保物料

Pin数	尺寸A	尺寸B
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50
21	50.00	55.00
22	52.50	57.50
23	55.00	60.00
24	57.50	62.50
25	60.00	65.00
26	62.50	67.50
27	65.00	70.00

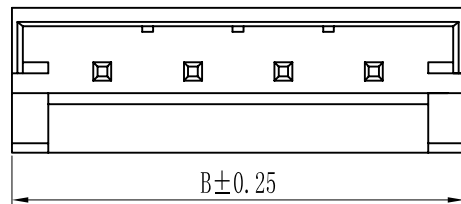

P. C. B LAYOUT

## 技术参数 SPECIFICATIONS

- ◆ 间距: 2.5 Pitch: 2.5
- ◆ 适用线规: AWG#22-#28  
Applicable Wire: AWG#22-#28
- ◆ 额定电压: AC, DC, 250V (有效值)  
Voltage rating: AC, DC, 250V(rms)
- ◆ 额定电流: 2.5A, AC, DC (AWG#22)  
Current rating: 2.5A, AC, DC (AWG#22)
- ◆ 耐压值: 800V AC/minute  
Withstand voltage: 800V AC/minute
- ◆ 工作温度: -25°C ~ +85°C  
Working Temp: -25°C ~ +85°C
- ◆ 绝缘电阻: ≥ 1000MΩ  
Insulation resistance: ≥ 1000MΩ
- ◆ 接触电阻: ≤ 10mΩ  
Contact resistance: ≤ 10mΩ

## 材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94-V0  
Insulator: Nylon66 UL94-V0
- ◆ 接触针: 黄铜  
Contact PIN: Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<b>东莞市康导新能源科技有限公司</b> DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: EH-NA (打K)	
				LINEAR: 0.0 ± 0.25 ANGLES: X° REF ± 6°		APPROVED					DWG. NO:	
A0		新图面发行		2018.12.06		DESIGNER			TITLE: 2.50mm pitch Single Wafer		REV: A0 SHEET: 1/1	
REV.		REVISION RECORD		DATE		SIZE: A4	0.00 ± 0.08	X° X' ± 2°	DRAWN	肖丽娟	2018.12.06	