

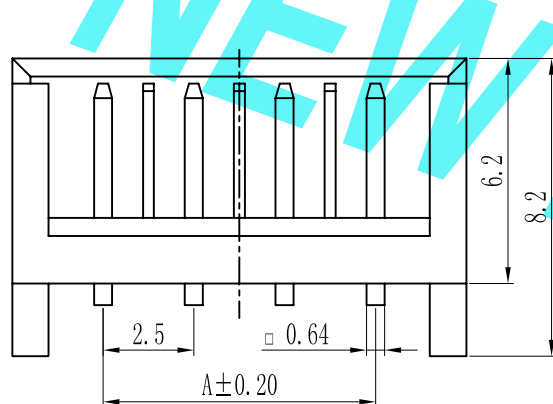


环保物料

Pin数	尺寸A	尺寸B
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50
21	50.00	55.00
22	52.50	57.50
23	55.00	60.00
24	57.50	62.50
25	60.00	65.00
26	62.50	67.50
27	65.00	70.00

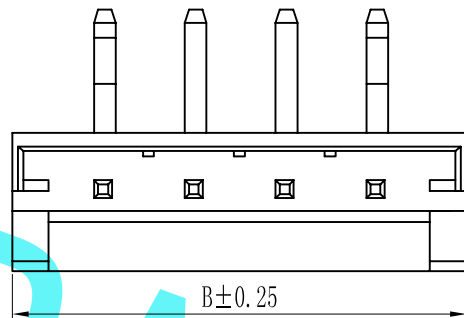

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆ 间距: 2.5 Pitch: 2.5
 - ◆ 适用线规: AWG#22-#28
Applicable Wire: AWG#22-#28
 - ◆ 额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V (rms)
 - ◆ 额定电流: 2.5A, AC, DC (AWG#22)
Current rating: 2.5A, AC, DC (AWG#22)
 - ◆ 耐压值: 800V AC/minute
Withstand voltage: 800V AC/minute
 - ◆ 工作温度: -25°C ~ +85°C
Working Temp: -25°C ~ +85°C
 - ◆ 绝缘电阻: ≥ 1000MΩ
Insulation resistance: ≥ 1000MΩ
 - ◆ 接触电阻: ≤ 10mΩ
Contact resistance: ≤ 10mΩ
- 材料 MATERIAL
- ◆ 绝缘体: 尼龙66, UL94-V0
Insulator: Nylon66 UL94-V0
 - ◆ 接触针: 黄铜
Contact PIN: Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD		PART. NO: EH-NAW (打K)
				LINEAR	ANGLES	APPROVED			公司网址: www.dgoonne.cn 公司电话: 0769-85337533 销售热线: 2850175986@qq.com 公司传真: 0769-85392827		DWG. NO:
A0	新图面发行	2018.12.06	UNIT: MM	0.00 ± 0.15	X° ± 3°	DESIGNER			TITLE: 2.50mm pitch Single Wafer		REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 ± 0.08	X° X' ± 2°	DRAWN	肖丽娟	2018.12.06			SHEET: 1/1