


ROHS




For reference only

Pin数	尺寸A	尺寸B
2×2	1.0	2.0
2×3	2.0	3.0
2×4	3.0	4.0
2×5	4.0	5.0
2×6	5.0	6.0
2×7	6.0	7.0
2×8	7.0	8.0
2×9	8.0	9.0
2×10	9.0	10.0
2×11	10.0	11.0
2×12	11.0	12.0
2×13	12.0	13.0
2×14	13.0	14.0
2×15	14.0	15.0
2×16	15.0	16.0
2×17	16.0	17.0
2×18	17.0	18.0
2×19	18.0	19.0
2×20	19.0	20.0
2×21	20.0	21.0
2×22	21.0	22.0
2×23	22.0	23.0
2×24	23.0	24.0
2×25	24.0	25.0
2×26	25.0	26.0
2×27	26.0	27.0
2×28	27.0	28.0
2×29	28.0	29.0
2×30	29.0	30.0
2×31	30.0	31.0
2×32	31.0	32.0
2×33	32.0	33.0
2×34	33.0	34.0
2×35	34.0	35.0
2×36	35.0	36.0
2×37	36.0	37.0
2×38	37.0	38.0
2×39	38.0	39.0
2×40	39.0	40.0
2×41	40.0	41.0
2×42	41.0	42.0
2×43	42.0	43.0
2×44	43.0	44.0
2×45	44.0	45.0
2×46	45.0	46.0
2×47	46.0	47.0
2×48	47.0	48.0
2×49	48.0	49.0
2×50	49.0	50.0

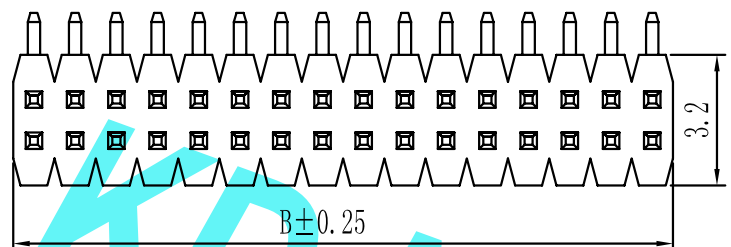

Height
H=1.0mm
H=1.5mm

Specification:
 Current Rating : 0.75AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 30mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

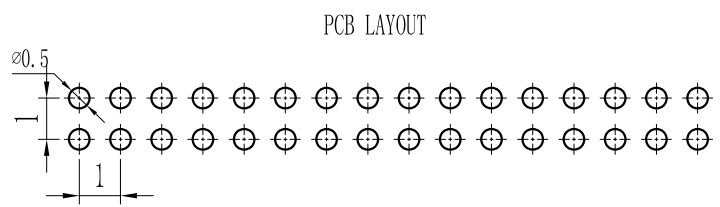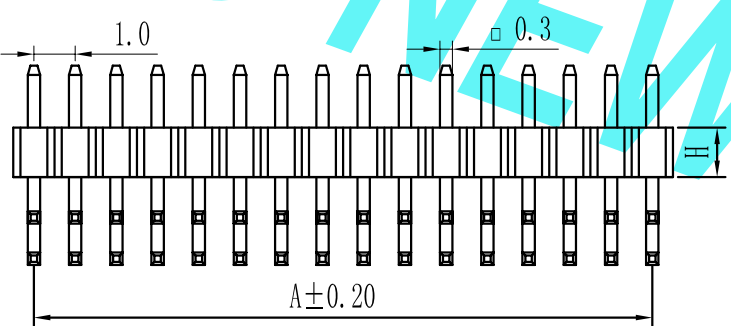

P 10 9D-XXX X X-XX-X-XXX					
① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail&Mounting Style: 9D=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=Horizontal SMT Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin : : : : 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue	
⑥ Material Type: A-PBT B-PA46 C-PA6T D-PA9T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" : 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF(Halogen Free)	⑨ Customer Code		

REV.	REVISION RECORD		DATE	SIZE: A4	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE
					LINEAR	APPROVED		
					ANGLES	DESIGNER		
					0.00±0.15 X° ±3°	DRAWN		
				0.00±0.08 X° X'±2°				

东莞市康导新能源科技有限公司
 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD.
 Web: www.dgconne.com Tel: 0769-85337633
 Email: 2850175986@qq.com Fax: 0769-85392827

TITLE:
Pitch1.0mm Pin Header,Single Plastic,
Dual Row,Right Angle Type

PART. NO:	KDPH-0016	
DWG. NO:	ENDE0016	
REV:	AO	SHEET: 1/1