
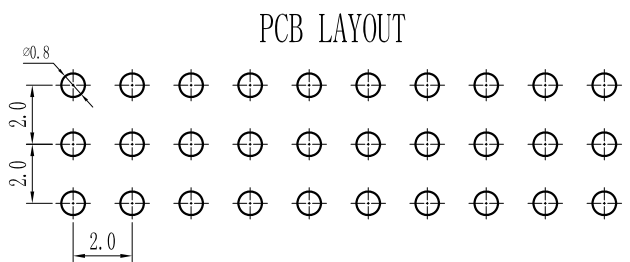
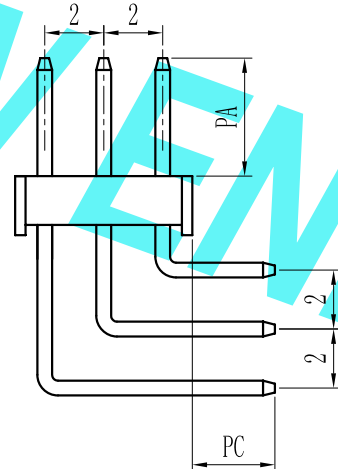
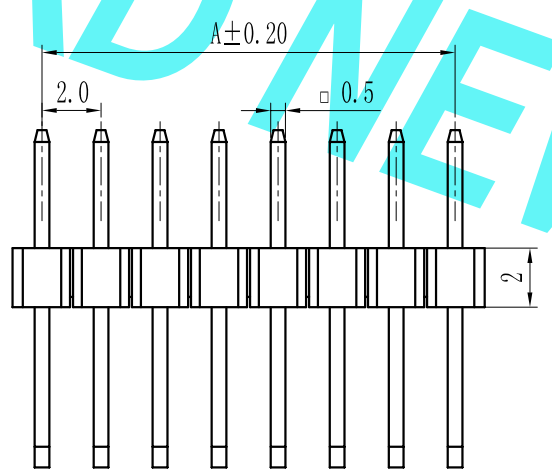


ROHS

For reference only

Pin数	尺寸A	尺寸B
3×1	-	2.0
3×2	2.0	4.0
3×3	4.0	6.0
3×4	6.0	8.0
3×5	8.0	10.0
3×6	10.0	12.0
3×7	12.0	14.0
3×8	14.0	16.0
3×9	16.0	18.0
3×10	18.0	20.0
3×11	20.0	22.0
3×12	22.0	24.0
3×13	24.0	26.0
3×14	26.0	28.0
3×15	28.0	30.0
3×16	30.0	32.0
3×17	32.0	34.0
3×18	34.0	36.0
3×19	36.0	38.0
3×20	38.0	40.0
3×21	40.0	42.0
3×22	42.0	44.0
3×23	44.0	46.0
3×24	46.0	48.0
3×25	48.0	50.0
3×26	50.0	52.0
3×27	52.0	54.0
3×28	54.0	56.0
3×29	56.0	58.0
3×30	58.0	60.0
3×31	60.0	62.0
3×32	62.0	64.0
3×33	64.0	66.0
3×34	66.0	68.0
3×35	68.0	70.0
3×36	70.0	72.0
3×37	72.0	74.0
3×38	74.0	76.0
3×39	76.0	78.0
3×40	78.0	80.0
3×41	80.0	82.0
3×42	82.0	84.0
3×43	84.0	86.0
3×44	86.0	88.0
3×45	88.0	90.0
3×46	90.0	92.0
3×47	92.0	94.0
3×48	94.0	96.0
3×49	96.0	98.0
3×50	98.0	100.0
3×51	100.0	102.0
3×52	102.0	104.0

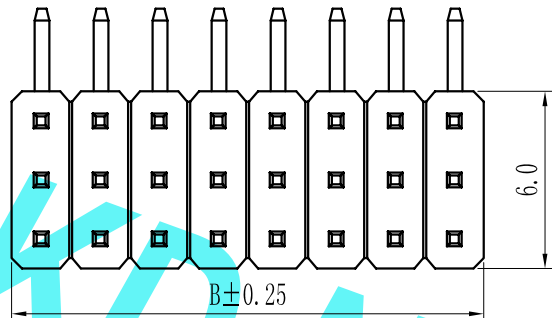

Specification:
 Current Rating : 1.5AMP
 Temperature Range : -40℃to+105℃
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

Height
 H=1.0mm、1.5mm、2.0mm、3.0mm

P 20 9D-XXX X X -XX -X -XXX

① Series No: P=Pin Header F=Female Header D=Box Header E=Injector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 30=3.96 50=5.08	③ Tail&Mounting Style: 9D=Right Angle DIP Type 9S=Straight SMT Type 0S=Horizontal SMT Type	④ No. of Pins: Single Row 101=1*1Pin 102=1*2Pin 140=1*40pin	⑤ Double Row 201=2*1Pin 202=2*2Pin 240=2*40pin	⑥ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
--	---	---	---	---	--

⑦ Material Type: A=PBT B=PA46 C=PA6T D=PA9T E=LCP	⑧ Plating Type: 08=Sn-Au 18=Ni 28=Sn 38=Matte-Tin 58=Au 0A=Sn-Au 1u" 0F=Sn-Au 10u" 5A=Au 1u" 0B=Sn-Au 2u" 0G=Sn-Au 15u" 5B=Au 2u" 0C=Sn-Au 3u" 0H=Sn-Au 30u" 5C=Au 3u" 0D=Sn-Au 4u" 0I=Sn-Au 40u" 5D=Au 4u" 0E=Sn-Au 5u" 0J=Sn-Au 50u" 5J=Au 50u"	⑨ RoHS Request: 0:No Request 1:RoHS 2:HF (Halogen Free)	⑩ Customer Code
--	---	--	-----------------

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN
GENERAL TOLERANCES				SCALE: 1:1	NAME	DATE	
LINEAR		ANGLES		APPROVED			
0.00±0.25		X° REF±6°		DESIGNER			
0.00±0.15		X° ±3°					

东莞市康导新能源科技有限公司
 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD.
 Web: www.dgconne.com Tel: 0769-85337633
 Email: 2850175986@qq.com Fax: 0769-85392827

TITLE:
 Pitch2.00mm Pin Header, Single Plastic,
 Triple Row, Right Angle Type

PART. NO:	KDPH-0067	
DWG. NO:	ENDE0067	
REV:	A0	SHEET: 1/1