

环保物料

Reference Informations:



*Material: PBT, UL94V-0

*Suitable 42010 series Terminal

Dimensional Information:

Part No.	Dimensions								
	A	B	C	D	E	F	G	H	J
6P	5.00	7.00	8.20	2.40	10.20	10.30	2.40	4.80	2.50
8P	5.00	8.80	8.20	4.40	10.20	11.20	2.40	5.60	2.50
10P	6.10	10.90	10.40	6.40	12.20	13.30	2.60	6.70	2.60
12P	7.10	12.90	12.40	8.40	14.20	15.30	2.60	7.70	2.60
14P	8.10	14.90	14.60	10.40	16.20	17.30	2.60	8.70	2.60
16P	9.10	16.90	16.40	12.40	18.20	19.30	2.60	9.70	2.60
18P	10.10	18.90	18.40	14.40	20.20	21.30	2.60	10.70	2.60
20P	11.10	20.90	20.40	16.40	22.20	23.30	2.60	11.70	2.60

Unit: mm

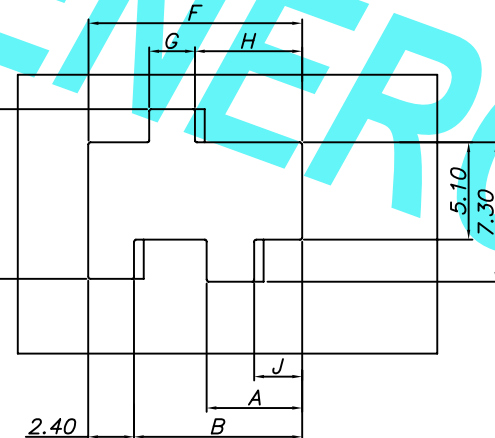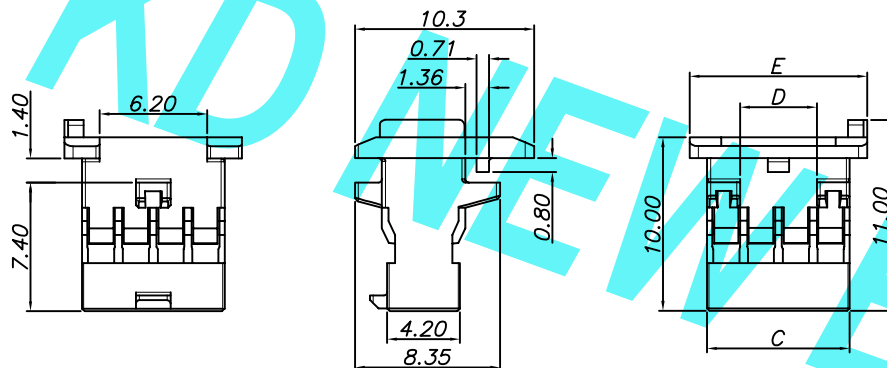

RECOMMENDED PANEL TOLERANCE ± 0.10
THICKNESS 1.15 ± 0.10

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-86392827	PART. NO:	42010H00-2XNP*-PT	
				LINEAR	ANGLES	APPROVED				DWG. NO:	ENDE05	
A0	新图面发行	2018.07.28	UNIT: MM	0.00 \pm 0.15	X° \pm 3°	DESIGNER			TITLE:	2.00mm pitch Dual Housing		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 \pm 0.08	X° X' \pm 2°	DRAWN	肖丽娟	2018.07.28	REV:	A0	SHEET:	1/1