


环保物料

Reference Informations:

*Material: Housing: Nylon 66, UL94V-0

*Suitable 22008 series Terminal

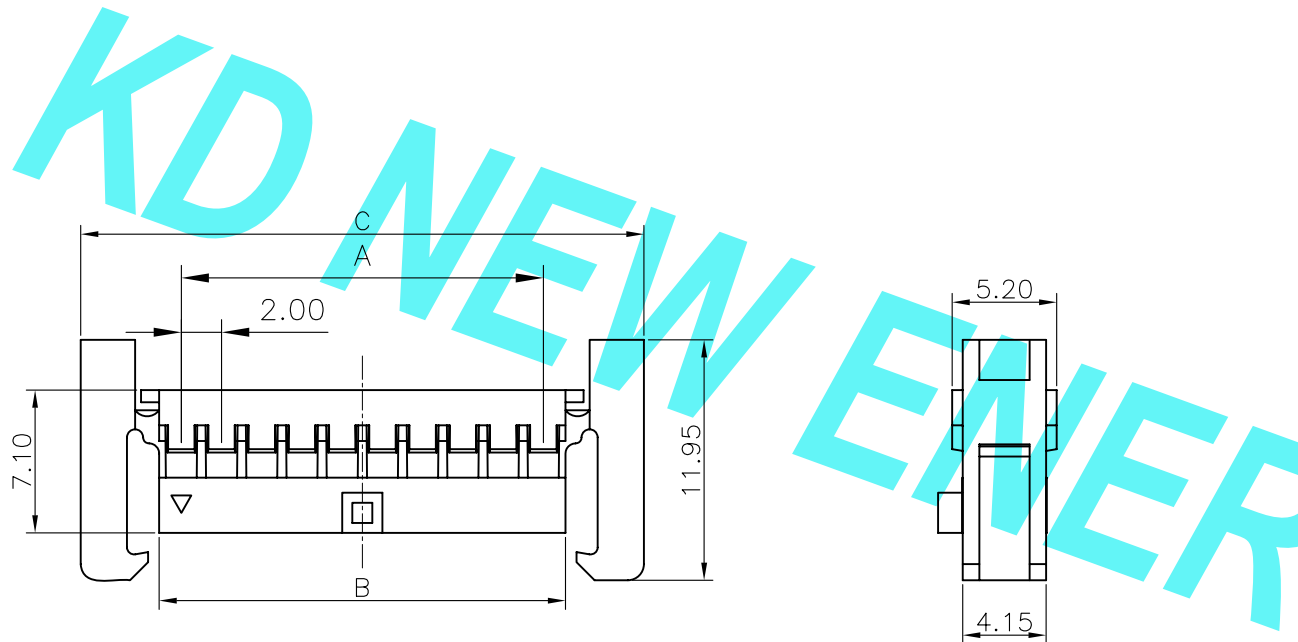

Dimensional Information:

Circuit	Dimensions		
	A	B	C
2x10P	18.00	20.20	28.00
2x12P	22.00	24.20	32.00
2x13P	24.00	26.20	34.00
2x14P	26.00	28.20	36.00
2x15P	28.00	30.20	38.00
2x16P	30.00	32.20	40.00
2x17P	32.00	34.20	42.00
2x18P	34.00	36.20	44.00
2x19P	36.00	38.20	46.00
2x20P	38.00	40.20	48.00
2x21P	40.00	42.20	50.00
2x22P	42.00	44.20	52.00
2x23P	44.00	46.20	54.00
2x24P	46.00	48.20	56.00
2x25P	48.00	50.20	58.00

Unit: mm

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgkonne.cn 公司电话: 0769-85337633 邮箱: 2860175988@qq.com 公司传真: 0769-85392827	PART. NO: 22008H00-2xNPA-66-02	
				LINEAR	ANGLES	APPROVED				DWG. NO: ENDE05	
A0	新图面发行	2018.07.28	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER			TITLE: 2.00mm pitch Dual Housing	REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.07.28			