


环保物料

Reference Informations:

*Material: Housing: Nylon 66, UL94V-0

*Suitable 22008 series Terminal

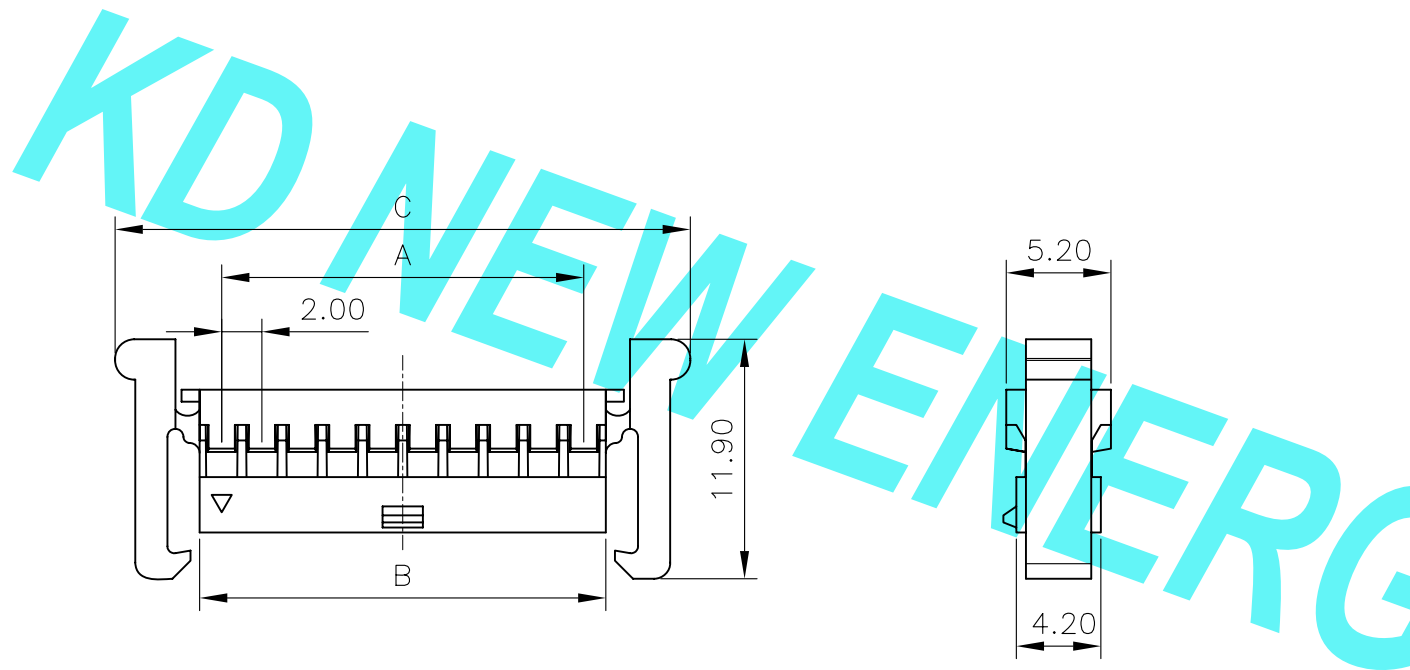

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2x2P	--	4.20	12.60
2x3P	4.00	6.20	14.60
2x4P	6.00	8.20	16.60
2x5P	8.00	10.20	18.60
2x6P	10.00	12.20	20.60
2x7P	12.00	14.20	22.60
2x8P	14.00	16.20	24.60
2x9P	16.00	18.20	26.60
2x10P	18.00	20.20	28.60
2x11P	20.00	22.20	30.60
2x12P	22.00	24.20	32.60
2x13P	24.00	26.20	34.60
2x14P	26.00	28.20	36.60
2x15P	28.00	30.20	38.60
2x16P	30.00	32.20	40.60
2x17P	32.00	34.20	42.60
2x18P	34.00	36.20	44.60
2x19P	36.00	38.20	46.60
2x20P	38.00	40.20	48.60
2x21P	40.00	42.20	50.60
2x22P	42.00	44.20	52.60
2x23P	44.00	46.20	54.60
2x24P	46.00	48.20	56.60

Unit: mm

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337633 邮箱: 2860175988@qq.com 公司传真: 0769-85392827	PART. NO:	
				LINEAR ANGLES 0.0±0.25 X° REF±6°		APPROVED				22008H00-2xNPA-66-01	
A0	新图面发行	2018.07.28	UNIT: MM	0.00±0.15 X° ±3°		DESIGNER				DWG. NO:	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08 X° X'±2°		DRAWN	肖丽娟	2018.07.28		TITLE:	ENDE05
									2.00mm pitch Dual Housing	REV: A0	SHEET: 1/1