


环保物料

孔位 Poles	A	B	C
4	3.0	6.5	5.1
5	4.0	7.5	6.1
6	5.0	8.5	7.1
7	6.0	9.5	8.1
8	7.0	10.5	9.1
9	8.0	11.5	10.1
10	9.0	12.5	11.1
11	10.0	13.5	12.1
12	11.0	14.5	13.1
13	12.0	15.5	14.1
14	13.0	16.5	15.1
15	14.0	17.5	16.1
16	15.0	18.5	17.1
17	16.0	19.5	18.1
18	17.0	20.5	19.1
19	18.0	21.5	20.1
20	19.0	22.5	21.1
21	20.0	23.5	22.1
22	21.0	24.5	23.1
23	22.0	25.5	24.1
24	23.0	26.5	25.1
25	24.0	27.5	26.1
26	25.0	28.5	27.1
27	26.0	29.5	28.1
28	27.0	30.5	29.1
29	28.0	31.5	30.1
30	29.0	32.5	31.1
31	30.0	33.5	32.1
32	31.0	34.5	33.1
33	32.0	35.5	34.1
34	33.0	36.5	35.1
35	34.0	37.5	36.1
36	35.0	38.5	37.1
37	36.0	39.5	38.1
38	37.0	40.5	39.1
39	38.0	41.5	40.1
40	39.0	42.5	41.1

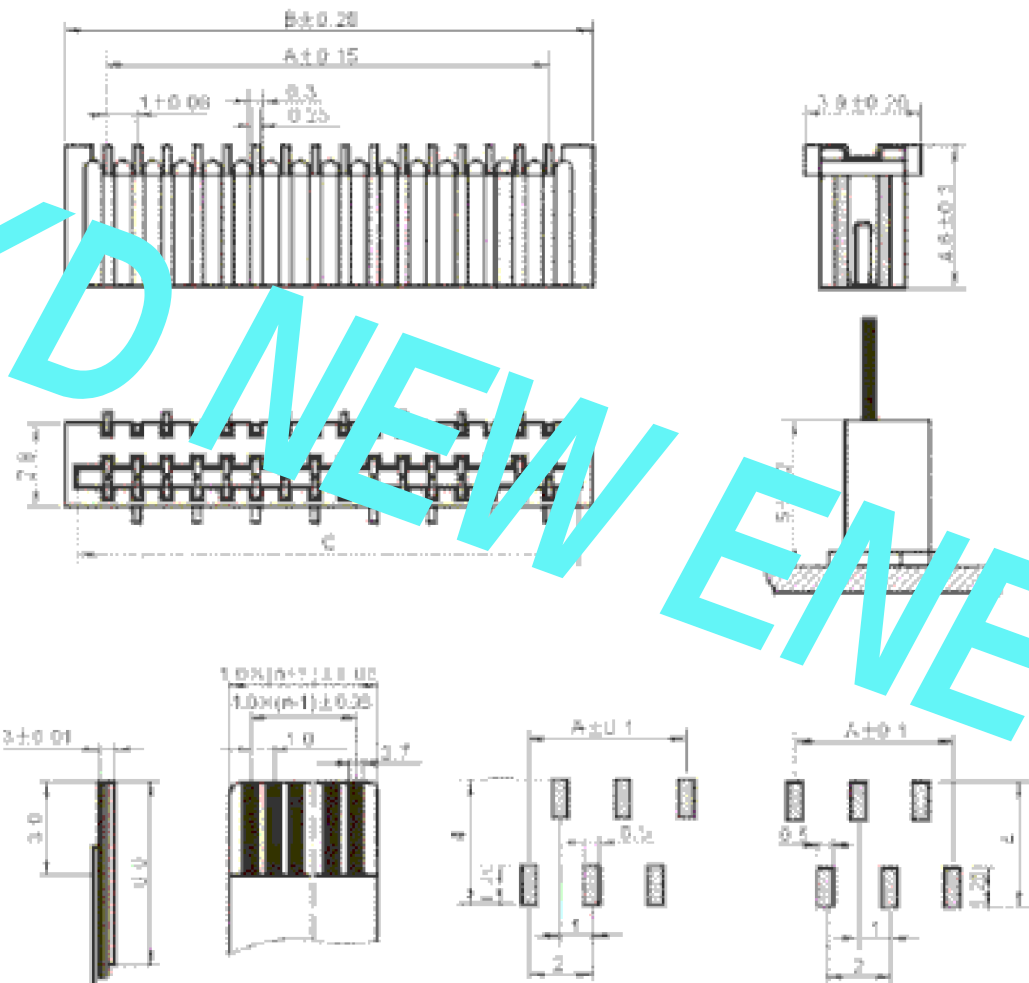


技术参数SPECIFICATIONS

极数: 4~40
Poles: 4~40
额定电压: AC, DC, 50V (50HZ有效值)
Voltage rating: AC, DC, 50V (500HZ有效值)
额定电流: 0.5A, AC, DC
Current rating: 0.5A, AC, DC
耐压值: 500V AC/minute
Withstang voltage: 500V AC/minute
工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
绝缘电阻: ≥800MΩ
Insulation resistance: ≥800MΩ
接触电阻: ≤0.02Ω
Contact resistance: ≤0.02Ω
双面接触
Dual Contact

接触件TERMINAL

材质: 磷青铜
Material: Phosphor Bronze
胶主料: NYLON
胶料: UL 94V-0
Material: Nylon, UL 94V-0
包装形式: PIPE
管装 Pipe Package
盒装 Box Package

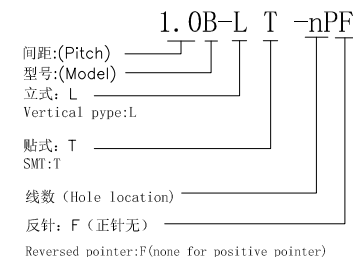

A0		新图面发行		2019.01.24		UNIT: MM		0.00±0.08		X° X'±2°		DRAWN		肖丽娟		2019.01.24		1.00mm pitch Dual Wafer		REV: A0		SHEET: 1/1	
REV.		REVISION RECORD		DATE		SIZE: A4		0.00±0.15		X° ±3°		DESIGNER		肖丽娟		2019.01.24		1.00mm pitch Dual Wafer		REV: A0		SHEET: 1/1	

东莞市康导新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD
公司网址: www.dgconne.cn 公司电话: 0769-85337633
手机号码: 2850175986@qq.com 公司传真: 0769-85392827

PART. NO: FPC 1.0B-LT
DWG. NO: KDFPC-0019