
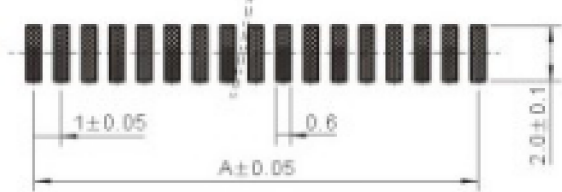
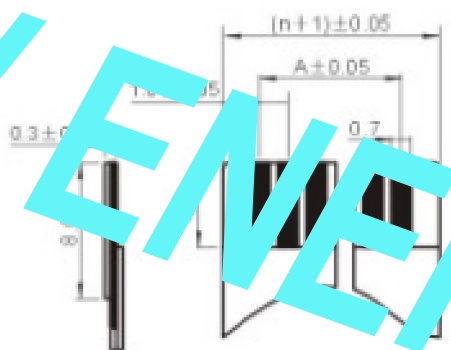
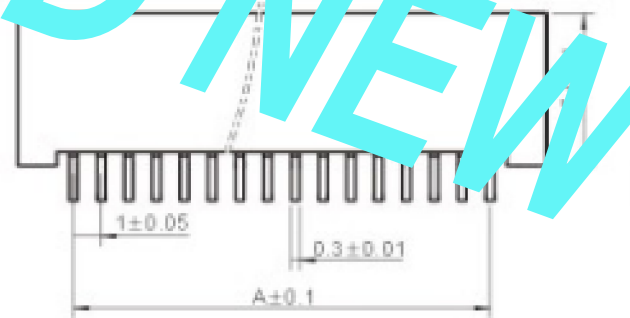



环保物料

孔位 Poles	A	B	C
4	3.0	5.1	7.0
5	4.0	6.1	8.0
6	5.0	7.1	9.0
7	6.0	8.1	10.0
8	7.0	9.1	11.0
9	8.0	10.1	12.0
10	9.0	11.1	13.0
11	10.0	12.1	14.0
12	11.0	13.1	15.0
13	12.0	14.1	16.0
14	13.0	15.1	17.0
15	14.0	16.1	18.0
16	15.0	17.1	19.0
17	16.0	18.1	20.0
18	17.0	19.1	21.0
19	18.0	20.1	22.0
20	19.0	21.1	23.0
21	20.0	22.1	24.0
22	21.0	23.1	25.0
23	22.0	24.1	26.0
24	23.0	25.1	27.0
25	24.0	26.1	28.0
26	25.0	27.1	29.0
27	26.0	28.1	30.0
28	27.0	29.1	31.0
29	28.0	30.1	32.0
30	29.0	31.1	33.0
31	30.0	32.1	34.0

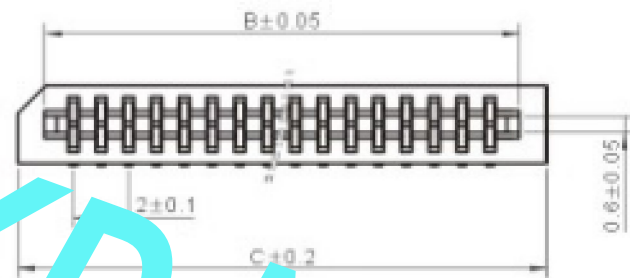

印制线路板
PCB P.C.B Layout


适用扁平电缆
Proper cable

技术参数SPECIFICATIONS

极数: 4~30
Poles: 4~30
额定电压: AC, DC, 200V (50HZ有效值)
Voltage rating: AC, DC, 200V (500HZ有效值)
额定电流: 0.4A, AC, DC
Current rating: 0.4A, AC, DC
耐压值: 200V AC/minute
Withstang voltage: 200V AC/minute
工作温度: -25°C~+85°C
Working Temperature: -25°C~+85°C
绝缘电阻: ≥500MΩ
Insulation resistance: ≥500MΩ
接触电阻: ≤0.02Ω
Contact resistance: ≤0.02Ω
双面接触
Dual Contact

接触件TERMINAL

材质: 磷青铜
Material: Phosphor Bronze
接触主体: USING
材质: PA46, 94V-0
Material: PA46, 94V-0
包装方式: PACKAGE
Packaging: Pipe Package

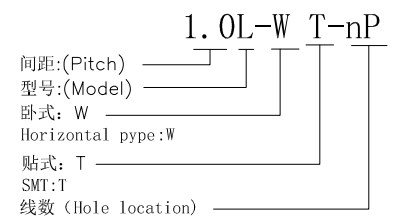

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgkonne.cn 公司电话: 0769-85337633 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO:	FPC 1.0L-WT	
				LINEAR	ANGLES	APPROVED				DWG. NO:	KDFPC-0032	
A0	新图面发行		2019.01.24	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER		TITLE:	1.00mm pitch Dual Wafer		
REV.	REVISION RECORD		DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.01.24	REV:	A0	SHEET: 1/1