


环保物料

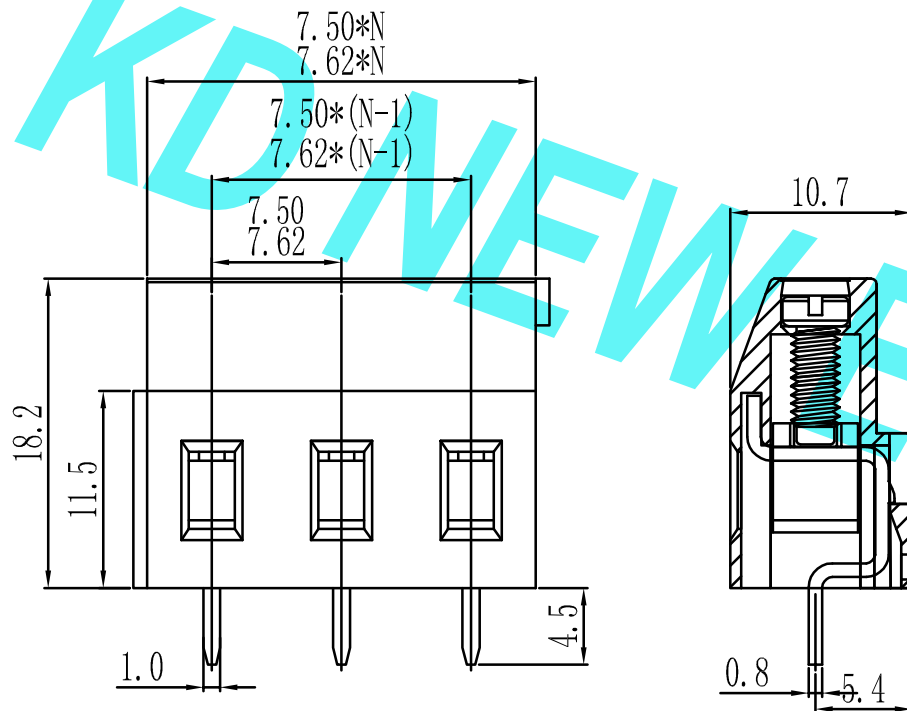

N=Number of Contacts

产品型号	MODEL	KD129V	
材质&电镀	MATERIAL&PLATING		
螺丝	Screw	M3.0, 钢, 镀锌 steel, Zinc Plated	
弹片	Reed	黄铜, 镀镍 Brass, Ni plated	
焊针	Pin header	黄铜, 镀锡 Brass, Tin plated	
塑件	Housing	PA66, UL94V-0	
电气性能	ELECTRICAL	UL	IEC
额定电压	Rated voltage	300V	450V
额定电流	Rated current	20A	20A
接触电阻	Contact resistance	20mΩ	
绝缘电阻	Insulation resistance	500MΩ/1000V	
耐电压	Withstanding voltage	AC2500V/1min	
使用线径	Wire range	24-12AWG 4.0mm ²	
机械性能	MECHANICAL		
温度范围	Temp. range	-40℃~+105℃	
瞬时温度	Max. soldering	+250℃, 5sec	
扭矩	Torque	0.5N.m 4.4Lb.in	
剥线长度	Strip length	6-7mm	

		GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: KD129V	
				1:1	APPROVED				DWG. NO: KDTB-0052	
				0.0±0.25 X° REF±6°	DESIGNER		TITLE:		REV: AO SHEET: 1/1	
AO		新图面发行		0.00±0.15 X° ±3°	DRAWN	肖丽娟	7.50/7.62mm pitch EURO TERMINAL BLOCKS			
REV.		REVISION RECORD		0.000±0.08 X° X'±2°						
		UNIT: MM								
		DATE								
		2019.02.14								
		SIZE: A4								