


环保物料

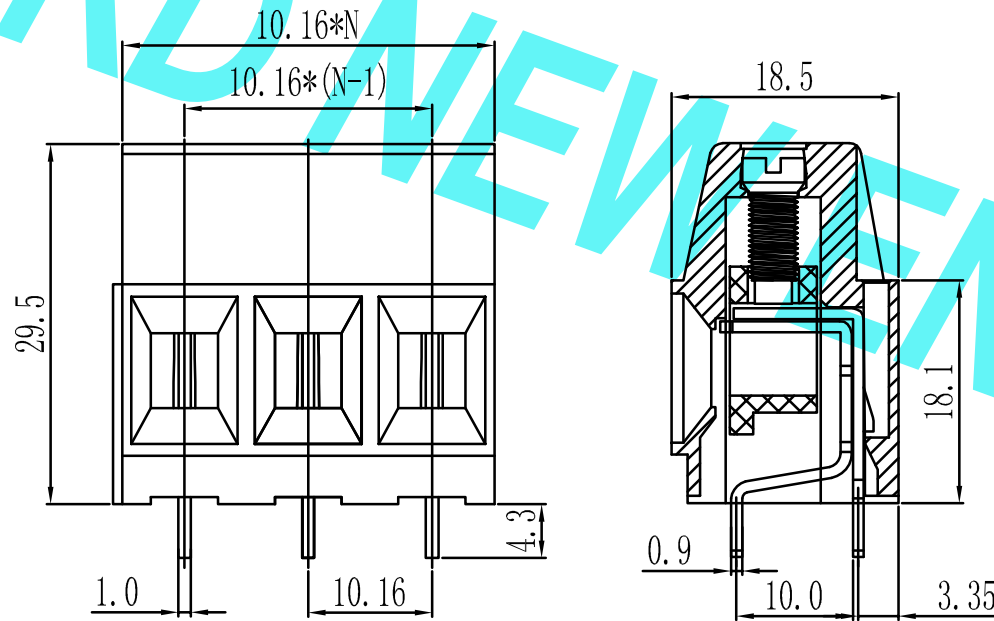

N=Number of Contacts

产品型号	MODEL	KD136	
材质&电镀	MATERIAL&PLATING	M4.0, 钢, 镀锌 steel, Zinc Plated	
螺丝	Screw	黄铜, 镀镍 Brass, Ni plated	
弹片	Reed	黄铜, 镀锡 Brass, Tin plated	
焊针	Pin header		
塑件	Housing	PA66, UL94V-0	
电气性能	ELECTRICAL	UL	IEC
额定电压	Rated voltage	600V	1000V
额定电流	Rated current	52A	65A
接触电阻	Contact resistance	20mΩ	
绝缘电阻	Insulation resistance	500MΩ/1000V	
耐电压	Withstanding voltage	AC3000V/1min	
使用线径	Wire range	20-6AWG 16.0mm ²	
机械性能	MECHANICAL		
温度范围	Temp. range	-40°C~+105°C	
瞬时温度	Max. soldering	+250°C, 5sec	
扭矩	Torque	1.2N.m 10.5Lb. in	
剥线长度	Strip length	10mm	

				GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO:	KD136	
				LINEAR 0.0±0.25 0.00±0.15 0.000±0.08		ANGLES X° REF±6° X° ±3° X° X'±2°		APPROVED			DWG. NO:	KDTB-0059	
A0	新图面发行	2019.02.14	UNIT: MM			DESIGNER			TITLE:		REV:	A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4			DRAWN	肖丽娟	2019.02.14	10.16mm pitch EURO TERMINAL BLOCKS				