


环保物料

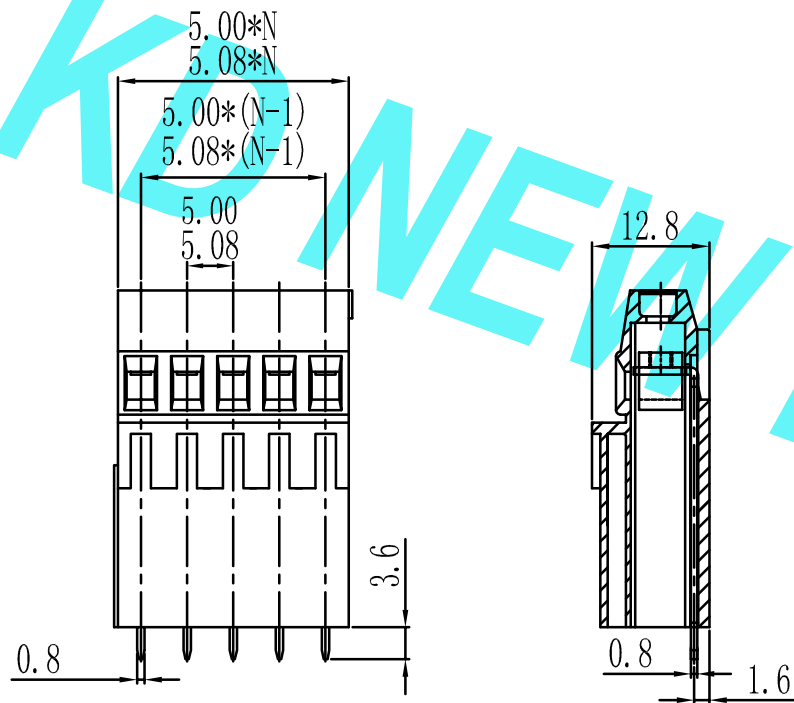

N=Number of Contacts

| | | | |
|-------|-----------------------|--------------------------------|------|
| 产品型号 | MODEL | KD128GG | |
| 材质&电镀 | MATERIAL&PLATING | | |
| 螺丝 | Screw | M2.5, 钢, 镀锌 steel, Zinc Plated | |
| 弹片 | Reed | 黄铜, 镀镍 Brass, Ni plated | |
| 焊针 | Pin header | 黄铜, 镀锡 Brass, Tin plated | |
| 塑件 | Housing | PA66, UL94V-0 | |
| 电气性能 | ELECTRICAL | UL | IEC |
| 额定电压 | Rated voltage | 300V | 250V |
| 额定电流 | Rated current | 20A | 24A |
| 接触电阻 | Contact resistance | 20mΩ | |
| 绝缘电阻 | Insulation resistance | 500MΩ/1000V | |
| 耐电压 | Withstanding voltage | AC2000V/1min | |
| 使用线径 | Wire range | 28-14AWG 2.5mm ² | |
| 机械性能 | MECHANICAL | | |
| 温度范围 | Temp. range | -40℃~+105℃ | |
| 瞬时温度 | Max. soldering | +250℃, 5sec | |
| 扭矩 | Torque | 0.4N.m 3.5Lb.in | |
| 剥线长度 | Strip length | 6-7mm | |

| | | | | | | | | | | | |
|------|-----------------|--------------------|----------|------------|-----------|----------|--|------------|-----------|--|------------|
| | | GENERAL TOLERANCES | | SCALE: | NAME | DATE | 东莞市康导新能源科技有限公司 DONGGUANG ED NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827 | | PART. NO: | KD128GG | |
| | | | | 1:1 | APPROVED | | | | DWG. NO: | KDTB-0045 | |
| | | | | 0.00±0.25 | X° REF±6° | | | | REV: | AO | SHEET: 1/1 |
| AO | 新图面发行 | 2019.02.14 | UNIT: MM | 0.00±0.15 | X° ±3° | DESIGNER | | TITLE: | | 5.00/5.08mm pitch EURO TERMINAL BLOCKS | |
| REV. | REVISION RECORD | DATE | SIZE: A4 | 0.000±0.08 | X° X'±2° | DRAWN | 肖丽娟 | 2019.02.14 | | | |