


环保物料

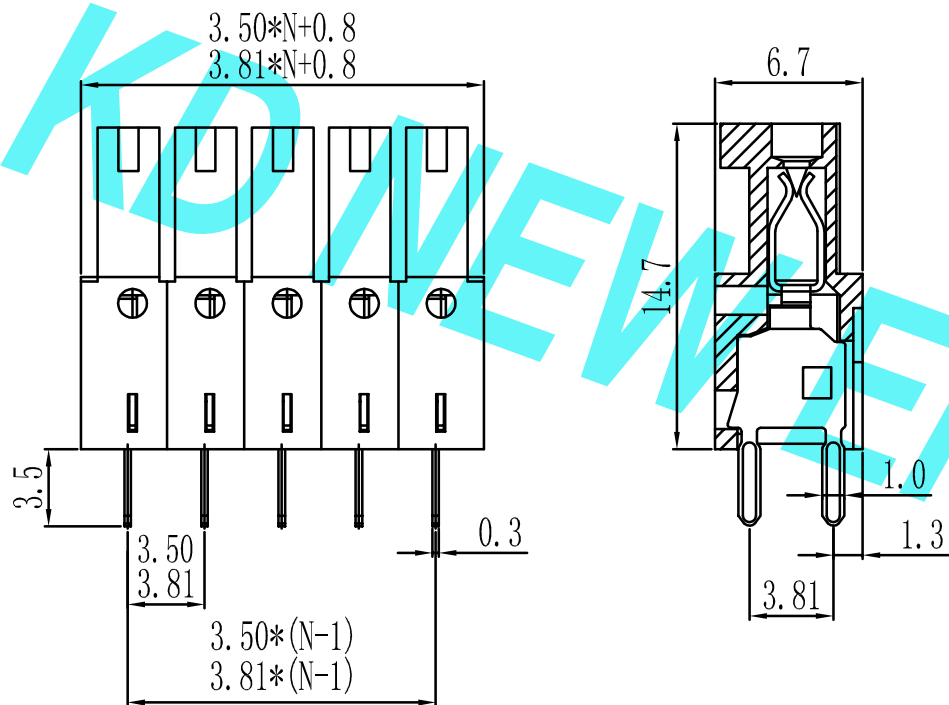

N=Number of Contacts

产品型号	MODEL	KD12EFV	
材质&电镀	MATERIAL&PLATING		
螺丝	Screw	-	
弹片	Reed	-	
焊针	Pin header	磷青铜, 镀锡 Phosphor Bronze, Tin plated	
塑件	Housing	PA66, UL94V-0	
电气性能	ELECTRICAL	UL	IEC
额定电压	Rated voltage	300V	250V
额定电流	Rated current	8A	7A
接触电阻	Contact resistance	20mΩ	
绝缘电阻	Insulation resistance	500MΩ/1000V	
耐电压	Withstanding voltage	AC1500V/1min	
使用线径	Wire range	-	
机械性能	MECHANICAL		
温度范围	Temp. range	-40℃~+105℃	
瞬时温度	Max. soldering	+250℃, 5sec	
扭矩	Torque	-	
剥线长度	Strip length	-	

		GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD.		PART. NO: KD12EFV	
		LINEAR: 0.0±0.25 ANGLES: X° REF±6°		1:1	APPROVED		公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827		DWG. NO: KDTB-0080	
A0	新图面发行	2019.02.18	UNIT: MM	DESIGNER			TITLE: 3.50/3.81mm pitch PLUGGABLE TERMINAL BLOCKS		REV: A0 SHEET: 1/1	
REV.	REVISION RECORD	DATE	SIZE: A4	DRAWN	肖丽娟	2019.02.18				