


环保物料

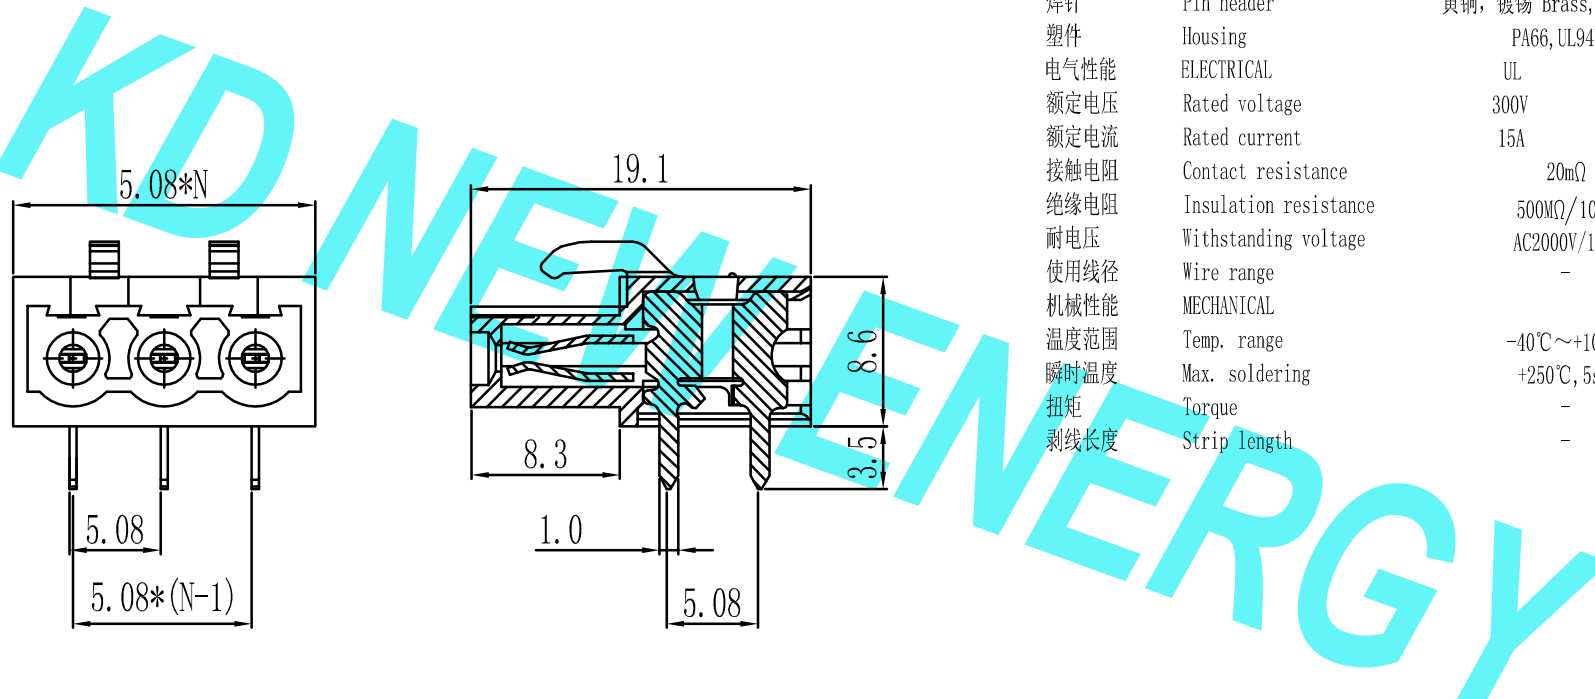

N=Number of Contacts

| | | | |
|-------|-----------------------|--------------------------|------|
| 产品型号 | MODEL | KD2EFR | |
| 材质&电镀 | MATERIAL&PLATING | | |
| 螺丝 | Screw | - | |
| 弹片 | Reed | - | |
| 焊针 | Pin header | 黄铜, 镀锡 Brass, Tin plated | |
| 塑件 | Housing | PA66, UL94V-0 | |
| 电气性能 | ELECTRICAL | UL | IEC |
| 额定电压 | Rated voltage | 300V | 320V |
| 额定电流 | Rated current | 15A | 20A |
| 接触电阻 | Contact resistance | 20mΩ | |
| 绝缘电阻 | Insulation resistance | 500MΩ/1000V | |
| 耐电压 | Withstanding voltage | AC2000V/1min | |
| 使用线径 | Wire range | - | |
| 机械性能 | MECHANICAL | | |
| 温度范围 | Temp. range | -40℃~+105℃ | |
| 瞬时温度 | Max. soldering | +250℃, 5sec | |
| 扭矩 | Torque | - | |
| 剥线长度 | Strip length | - | |

| | | | | | | | | | | | | |
|------|-----------------|------------|----------|--------------------|----------|---------------|------|------------|--|-----------------------|---------|------------|
| | | | | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | 东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827 | PART. NO: KD2EFR | | |
| | | | | LINEAR | ANGLES | APPROVED | | | | DWG. NO: KDTB-0153 | | |
| AO | 新图面发行 | 2019.02.18 | UNIT: MM | 0.00±0.15 | X° ±3° | DESIGNER | | | TITLE: 5.00/5.08mm pitch PLUGGABLE TERMINAL BLOCKS | | REV: AO | SHEET: 1/1 |
| REV. | REVISION RECORD | DATE | SIZE: A4 | 0.000±0.08 | X° X'±2° | DRAWN | 肖丽娟 | 2019.02.18 | | | | |