


环保物料

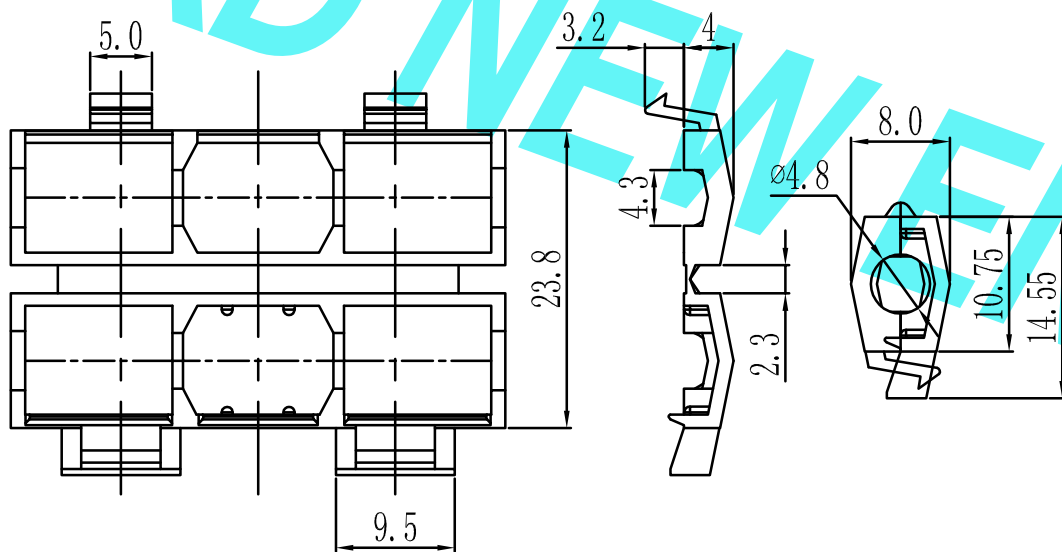

N=Number of Contacts

产品型号	MODEL	KFC1
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	-
弹片	Reed	-
焊针	Pin header	-
塑件	Housing	PP
电气性能	ELECTRICAL	-
额定电压	Rated voltage	-
额定电流	Rated current	-
接触电阻	Contact resistance	-
绝缘电阻	Insulation resistance	-
耐电压	Withstanding voltage	-
使用线径	Wire range	-
机械性能	MECHANICAL	-
温度范围	Temp. range	-40°C~+105°C
瞬时温度	Max. soldering	-
扭矩	Torque	-
剥线长度	Strip length	-

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: KFC1	
				LINEAR	ANGLES	APPROVED				DWG. NO: KDTB-0180	
A0	新图面发行	2019.02.23	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER			TITLE: SCREWLESS TERMINAL BLOCKS		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.02.23	REV:	A0	SHEET: 1/1