


环保物料

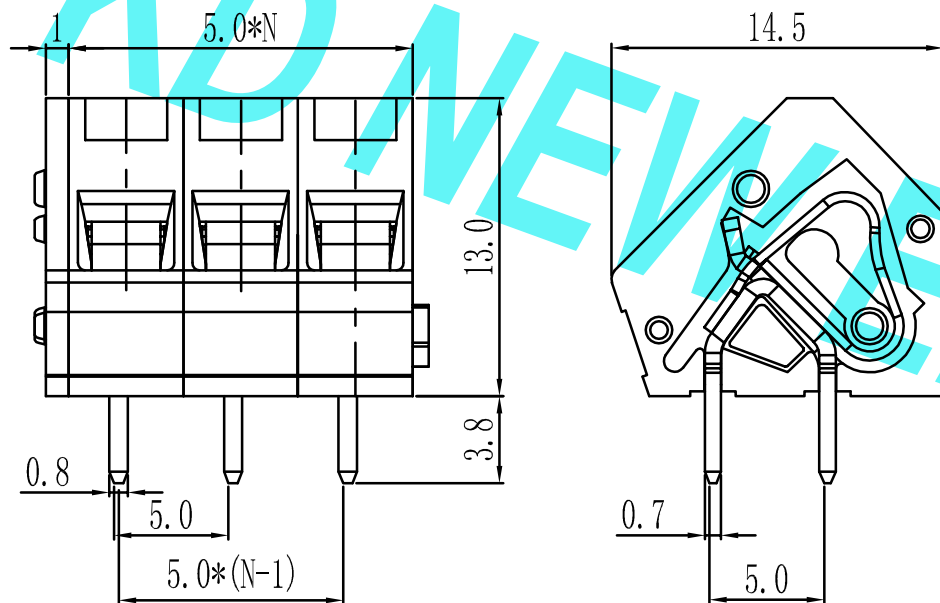

N=Number of Contacts

产品型号	MODEL	KD188A	
材质&电镀	MATERIAL&PLATING		
螺丝	Screw	-	
弹片	Reed	不锈钢 Stainless steel	
焊针	Pin header	黄铜, 镀锡 Brass, Tin plated	
塑件	Housing	PA66, UL94V-0	
电气性能	ELECTRICAL	UL	IEC
额定电压	Rated voltage	300V	450V/750V/1000V
额定电流	Rated current	15A	17A
接触电阻	Contact resistance	20mΩ	
绝缘电阻	Insulation resistance	500MΩ/1000V	
耐电压	Withstanding voltage	AC2000V/1min	
使用线径	Wire range	28-12AWG 2.5mm ²	
机械性能	MECHANICAL		
温度范围	Temp. range	-40℃~+105℃	
瞬时温度	Max. soldering	+250℃, 5sec	
扭矩	Torque	-	
剥线长度	Strip length	5-6mm	

				GENERAL TOLERANCES		SCALE:	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD.		PART. NO:		KD188A		
				LINEAR 0.0±0.25		ANGLES X° REF±6°		APPROVED		公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827		DWG. NO:		KDTB-0170	
A0	新图面发行	2019.02.23	UNIT: MM	0.00±0.15		X° ±3°		DESIGNER		TITLE:		REV:		A0	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08		X° X'±2°		DRAWN	肖丽娟	2019.02.23	5.00/5.08/7.50/7.62/10.0/10.16mm pitch SCREWLESS TERMINAL BLOCKS		SHEET: 1/1		