


环保物料

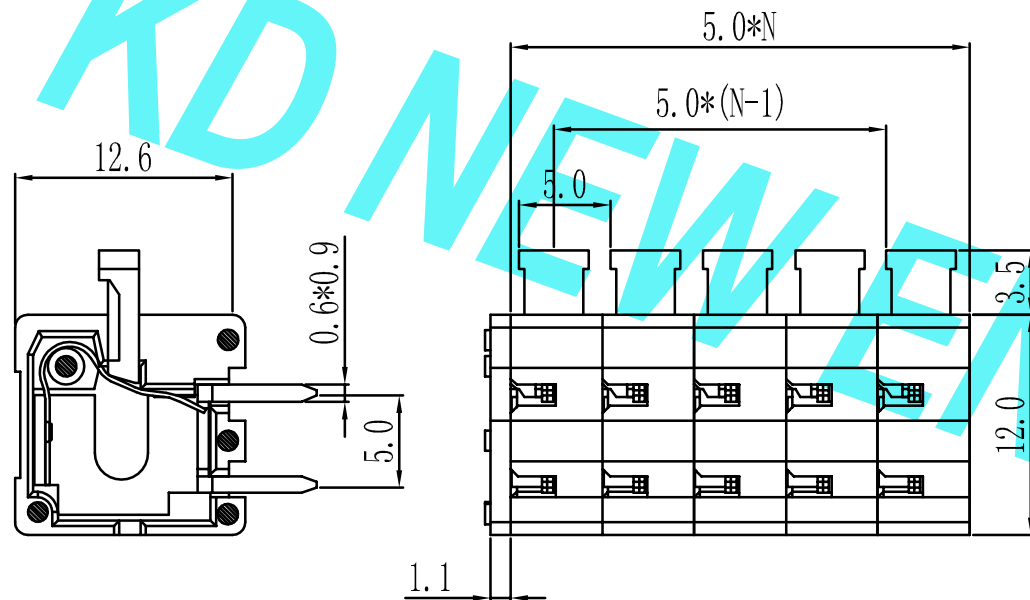

N=Number of Contacts

产品型号	MODEL	KD246R	
材质&电镀	MATERIAL&PLATING	-	
螺丝	Screw	-	
弹片	Reed	不锈钢 Stainless steel	
焊针	Pin header	黄铜, 镀锡 Brass, Tin plated	
塑件	Housing	PA66, UL94V-0	
电气性能	ELECTRICAL	UL	IEC
额定电压	Rated voltage	300V	250V/450V
额定电流	Rated current	8A	10A
接触电阻	Contact resistance	20mΩ	
绝缘电阻	Insulation resistance	500MΩ/1000V	
耐电压	Withstanding voltage	AC2000V/1min	
使用线径	Wire range	26-16AWG 1.5mm ²	
机械性能	MECHANICAL		
温度范围	Temp. range	-40°C ~ +105°C	
瞬时温度	Max. soldering	+250°C, 5sec	
扭矩	Torque	-	
剥线长度	Strip length	8-9mm	

		GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO:	KD246R	
		LINEAR 0.0±0.25 0.00±0.15 0.000±0.08		ANGLES X° REF±6° X° ±3° X° X'±2°	APPROVED				DWG. NO:	KDTB-0172
AO	新图面发行	2019.02.23	UNIT: MM		DESIGNER			TITLE:	5.00/7.50mm pitch SCREWLESS TERMINAL BLOCKS	
REV.	REVISION RECORD	DATE	SIZE: A4		DRAWN	肖丽娟	2019.02.23	REV:	AO	SHEET: 1/1