


环保物料

产品型号	MODEL	KD100-1
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	M3.0, 钢, 镀锌 steel, Zinc Plated
触点	Contact	黄铜, 镀镍 Brass, Nickel plated
焊针	Pin header	-
塑件	Housing	PA66, UL94V-0
电气性能	ELECTRICAL	
额定电压	Rated voltage	450V
额定电流	Rated current	7.5A
接触电阻	Contact resistance	20mΩ
绝缘电阻	Insulation resistance	5000MΩ/1000V
耐电压	Withstanding voltage	AC2500V/1min
使用线径	Wire range	22-14AWG 0.5-2.5mm ²
机械性能	MECHANICAL	
温度范围	Temp. range	-40°C ~ +110°C
瞬时温度	Max. soldering	+250°C, 5sec
扭矩	Torque	0.5N.m 4.4Lb.in
剥线长度	Strip length	6-7mm

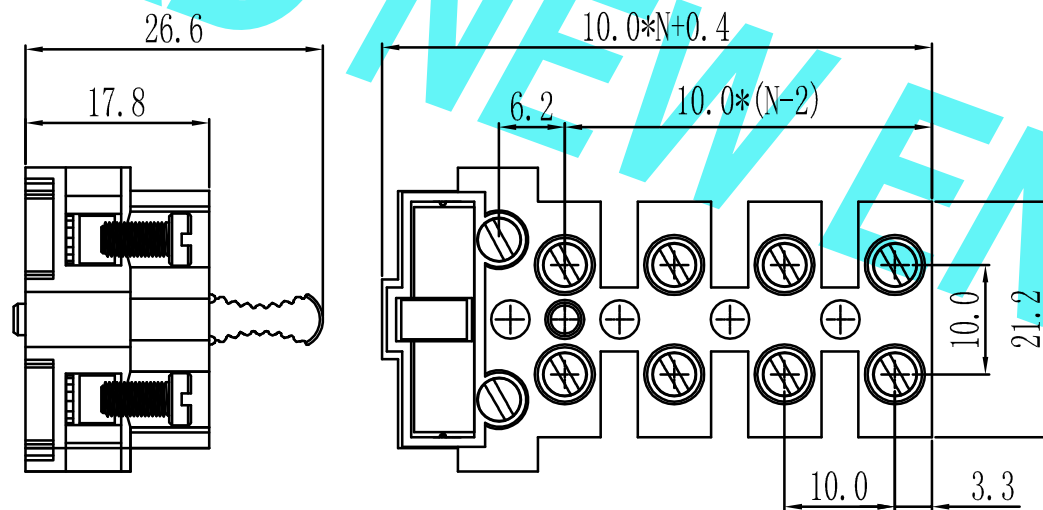

N=Number of Contacts

		GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: KD100-1	
		LINEAR: 0.0±0.25 ANGLES: X° REF±6°		1:1				DWG. NO: KDTB-0191	
A0	新图面发行	2019.02.25	UNIT: MM	DESIGNER			TITLE: 10.00mm pitch FEED THROUGH TERMINAL BLOCKS		
REV.	REVISION RECORD	DATE	SIZE: A4	DRAWN	肖丽娟	2019.02.25	REV: A0	SHEET: 1/1	