


环保物料

产品型号	MODEL	KD20H
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	M5.0, 钢, 镀锌 steel, Zinc Plated
触点	Contact	铝 Aluminum
焊针	Pin header	磷青铜 Phosphor Bronze
塑件	Housing	Nylon PA66, UL94V-2
电气性能	ELECTRICAL	
额定电压	Rated voltage	500V
额定电流	Rated current	to EN60998:76A
接触电阻	Contact resistance	-
绝缘电阻	Insulation resistance	-
耐电压	Withstanding voltage	-
使用线径	Wire range	6.0-16.0mm ²
机械性能	MECHANICAL	
温度范围	Temp. range	-40°C~+110°C
瞬时温度	Max. soldering	KD20H
扭矩	Torque	H
剥线长度	Strip length	No. of pole 12pole

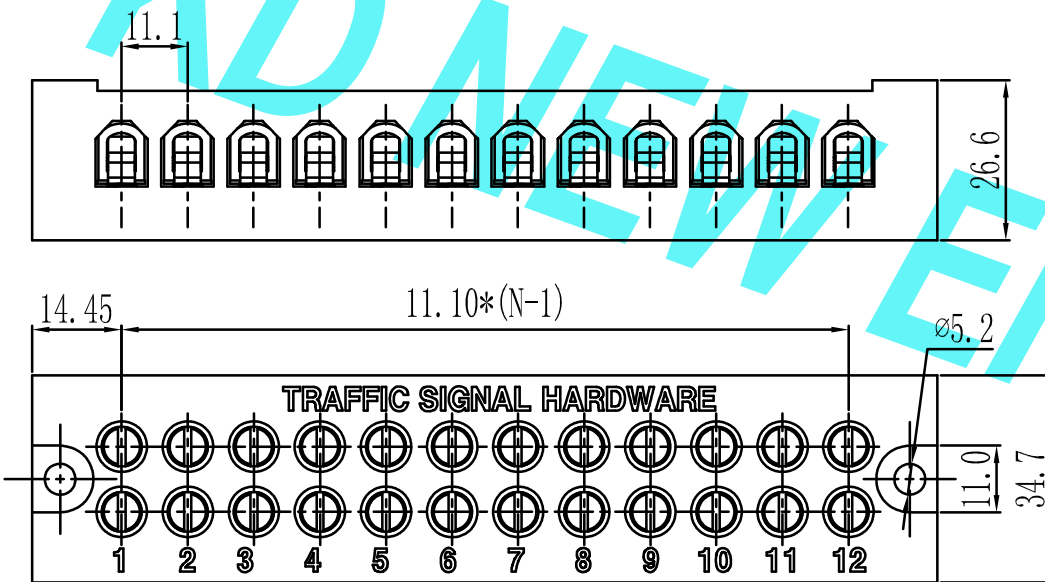

N=Number of Contacts

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. 公司地址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO:	KD20H	
				LINEAR	ANGLES	APPROVED				DWG. NO:	KDTB-0192	
AO	新图面发行	2019.02.25	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER			TITLE:	11.00mm pitch FEED THROUGH TERMINAL BLOCKS		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.02.25	REV:	AO	SHEET:	1/1