


环保物料

| | | |
|-------|-----------------------|----------------------------------|
| 产品型号 | MODEL | KD-30S |
| 材质&电镀 | MATERIAL&PLATING | |
| 螺丝 | Screw | M3.0, 钢, 镀镍 Steel, Nickel Plated |
| 端子 | Terminal | 黄铜, 0.8t 镀锡 Brass, Tin Plated |
| 塑件 | Housing | PA66, UL94V-0 |
| 电气性能 | ELECTRICAL | |
| 额定电压 | Rated voltage | 300V |
| 额定电流 | Rated current | 20A |
| 绝缘电阻 | Insulation resistance | 500MΩ/DC500V |
| 耐电压 | Withstanding voltage | AC2000V/1min |
| 使用线径 | Wire range | 22-14AWG 2.5mm ² |
| 机械性能 | MECHANICAL | |
| 温度范围 | Temp. range | -40℃~+105℃ |
| 扭矩 | Torque | 0.5N.m 4.4Lb.in |

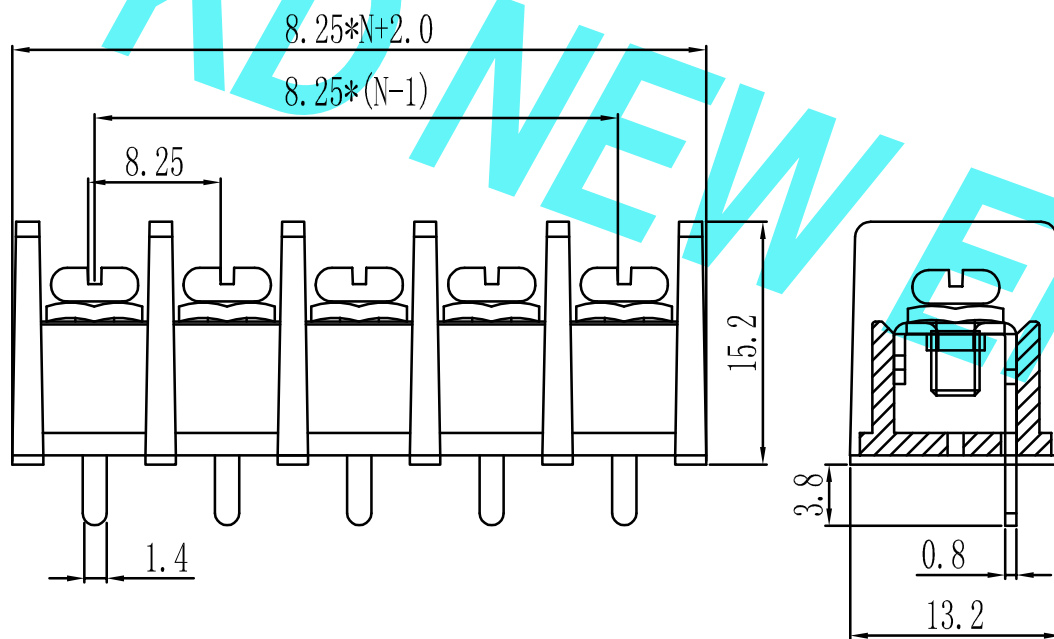

N=Number of Contacts

| | | | | | | | | | | | |
|------|-----------------|--------------------|----------|------------|----------|-------|--|------------|--|-----------|------------|
| | | GENERAL TOLERANCES | | SCALE: | NAME | DATE | 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD | | PART. NO: | KD-30S | |
| | | LINEAR | | 1:1 | APPROVED | | 公司网址: www.dgconne.cn 公司电话: 0769-85337633 电 邮: 2850175986@qq.com 公司传真: 0769-85392827 | | DWG. NO: | KDTB-0204 | |
| | | ANGLES | | DESIGNER | | | TITLE: | | REV: | AO | SHEET: 1/1 |
| AO | 新图面发行 | 2019.02.25 | UNIT: MM | 0.00±0.15 | X° ±3° | DRAWN | 肖丽娟 | 2019.02.25 | 8.25mm pitch AMERICAN/JAPANESE TERMINAL BLOCKS | | |
| REV. | REVISION RECORD | DATE | SIZE: A4 | 0.000±0.08 | X° X'±2° | | | | | | |