


环保物料

产品型号	MODEL	KD25CC/KD30CC/KD35CC
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	M3.0, 钢, 镀镍 Steel, Nickel Plated
端子	Terminal	黄铜, 0.8t 镀锡 Brass, Tin Plated
塑件	Housing	PA66, UL94V-0
电气性能	ELECTRICAL	
额定电压	Rated voltage	300V
额定电流	Rated current	20A
绝缘电阻	Insulation resistance	500MΩ/DC500V
耐电压	Withstanding voltage	AC2000V/1min
使用线径	Wire range	22-14AWG 2.5mm ²
机械性能	MECHANICAL	
温度范围	Temp. range	-40℃~+105℃
扭矩	Torque	0.5N.m 4.4Lb.in

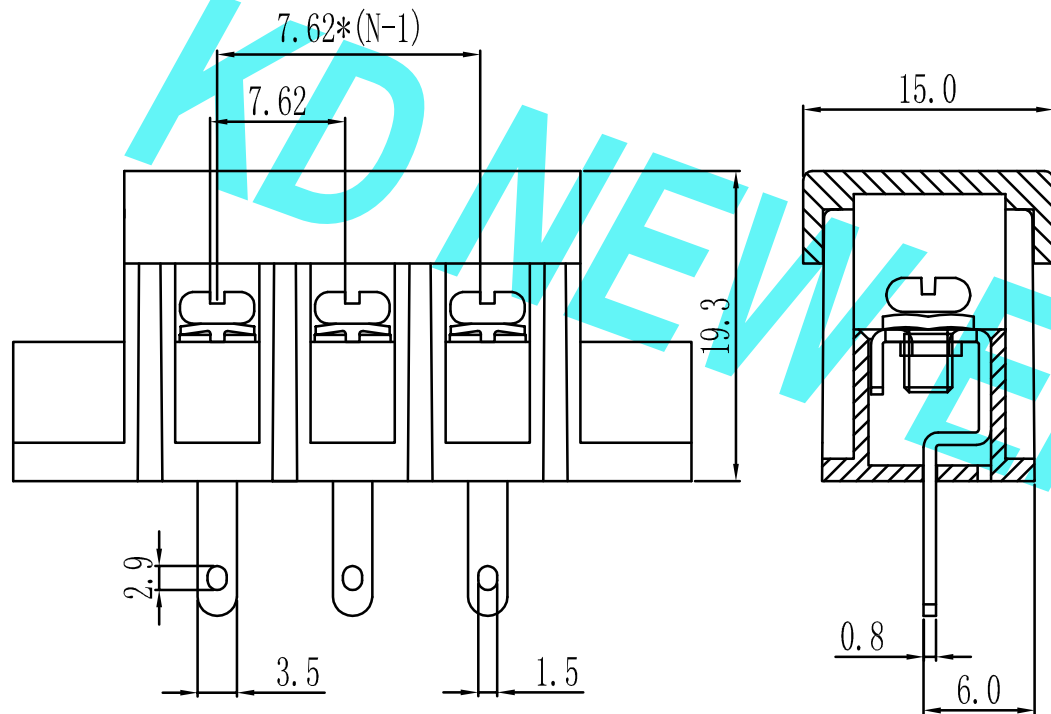

N=Number of Contacts

		GENERAL TOLERANCES		SCALE:	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG ED NEW ENERGY TECHNOLOGY CO., LTD		PART. NO:	
		LINEAR		1:1	APPROVED		公司网址: www.dgconne.cn 公司电话: 0769-85337633 电 邮: 2850175986@qq.com 公司传真: 0769-85392827		KD25CC/KD30CC/KD35CC	
		ANGLES			DESIGNER		TITLE:		DWG. NO:	
		0.0±0.25			DRAWN	肖丽娟	7.62/8.25/8.50mm pitch AMERICAN/JAPANESE TERMINAL BLOCKS		KDTB-0243	
A0		X° REF±6°							REV: A0 SHEET: 1/1	
REV.		X° X'±2°								
新图面发行		UNIT: MM								
2019.02.25		SIZE: A4								
REVISION RECORD		0.00±0.15								
DATE		0.00±0.08								