
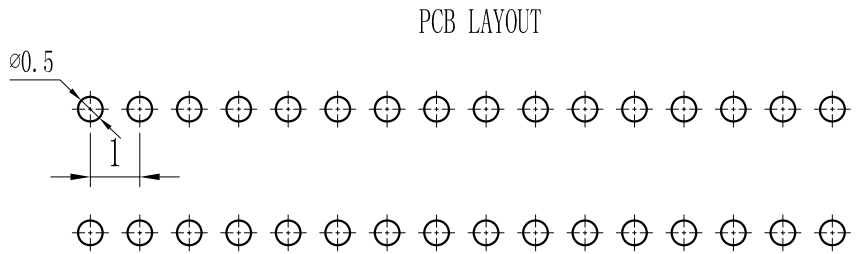
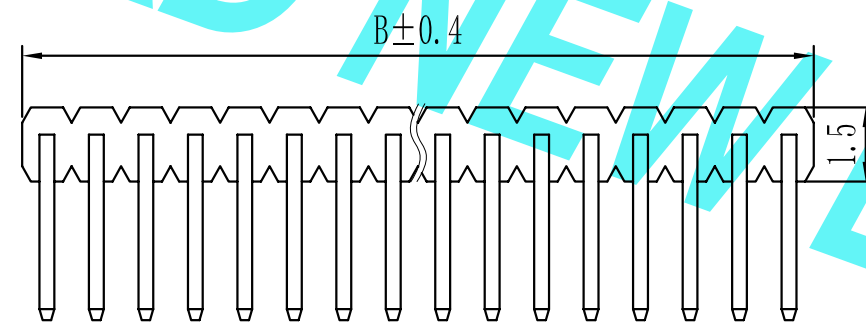


ROHS

For reference only

Pin数	尺寸A	尺寸B
1×2	1.0	2.0
1×3	2.0	3.0
1×4	3.0	4.0
1×5	4.0	5.0
1×6	5.0	6.0
1×7	6.0	7.0
1×8	7.0	8.0
1×9	8.0	9.0
1×10	9.0	10.0
1×11	10.0	11.0
1×12	11.0	12.0
1×13	12.0	13.0
1×14	13.0	14.0
1×15	14.0	15.0
1×16	15.0	16.0
1×17	16.0	17.0
1×18	17.0	18.0
1×19	18.0	19.0
1×20	19.0	20.0
1×21	20.0	21.0
1×22	21.0	22.0
1×23	22.0	23.0
1×24	23.0	24.0
1×25	24.0	25.0
1×26	25.0	26.0
1×27	26.0	27.0
1×28	27.0	28.0
1×29	28.0	29.0
1×30	29.0	30.0
1×31	30.0	31.0
1×32	31.0	32.0
1×33	32.0	33.0
1×34	33.0	34.0
1×35	34.0	35.0
1×36	35.0	36.0
1×37	36.0	37.0
1×38	37.0	38.0
1×39	38.0	39.0
1×40	39.0	40.0
1×41	40.0	41.0
1×42	41.0	42.0
1×43	42.0	43.0
1×44	43.0	44.0
1×45	44.0	45.0
1×46	45.0	46.0
1×47	46.0	47.0
1×48	47.0	48.0
1×49	48.0	49.0
1×50	49.0	50.0

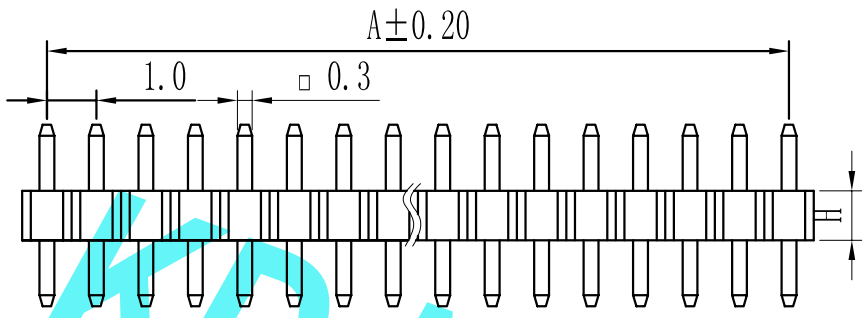

Height
H=1.0mm
H=1.5mm

Specification:
 Current Rating : 0.75AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 30mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

<p style="text-align: center;">P 10 9D-XXX X X-XX-X-XXX</p> <p style="text-align: center;">① ② ③ ④ ⑤</p>				
① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail&Mounting Style: 9D=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=horizontal SMT Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin ! ! ! ! 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brom C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A=PBT B=PA6 C=PA6T D=PA9T E=LCP	⑦ Plating Type: 0=Sn-Au 1=Ni 2=Sn 3=Matte-Tin 5=Au 0A=Sn-Au 1u" 0F=Sn-Au 10u" 5A-Au 1u" 0B=Sn-Au 2u" 0C=Sn-Au 15u" 5B-Au 2u" 0C=Sn-Au 3u" 0H=Sn-Au 30u" 5C-Au 3u" 0D=Sn-Au 4u" 0I=Sn-Au 40u" ! 0E=Sn-Au 5u" 0J=Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF(Halogen Free)	⑨ Customer Code	

REV.	REVISION RECORD		DATE	UNIT: MM	SIZE: A4	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	<p>东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. Web: www.dgconne.com Tel: 0769-85337633 Email: 2850175986@qq.com Fax: 0769-85392827</p>	PART. NO:	KDPH-0017		
						LINEAR	APPROVED				DWG. NO:	ENDE0017		
						0.0±0.25	ANGLES	DESIGNER				REV:	AO	SHEET: 1/1
						0.00±0.15	X° REF±6°	DRAWN						
					0.00±0.08	X° ±3°								
					X° X'±2°									